

1002339

hot street - dirt track

Audi AAN, ABY, RR turbo

I-5cyl 2.2L 20v DOHC (DTH/DTH)



	intake	exhaust
--	--------	---------

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 271°	258°
duration @ 1.0mm	: 234°	224°
valve lift	: 10.40mm	10.00mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 8° / 46°	52° / -8°
valve lift @ TDC	: 1.85mm	0.40mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

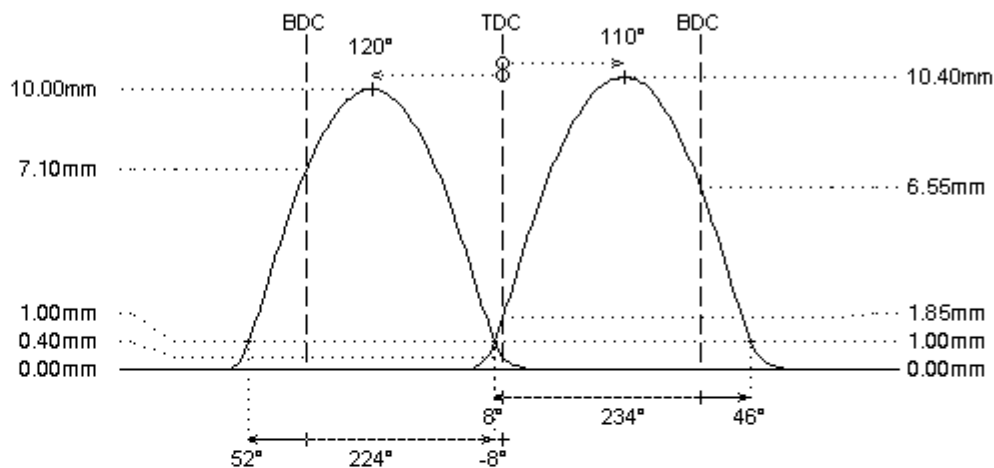

REMARKS :

- # - steel billet camshafts
- supplied with **adjustable chain sprockets** to optimize intake cam timing
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors