

1002449

full race

Audi AAN, ABY, RR turbo


I-5cyl 2.2L 20v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.25mm
duration @ 0.1mm	: 299°	279°
duration @ 1.0mm	: 256°	238°
valve lift	: 13.25mm	11.45mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 18° / 58°	59° / -1°
valve lift @ TDC	: 3.70mm	1.10mm
parts setup:		
cam wheels :	:	:
follower	: CC005	: CC005
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99370	: 99370
lower retainer	: not available	: not available
exterior spring	: PAC-E15009	: PAC-E15009
interior spring	: PAC-I15009	: PAC-I15009
fitted load / length	: 35kg @ 35.0mm	: 35kg @ 35.0mm
max. load / lift	: 111kg @ 14.0mm	: 111kg @ 14.0mm

REMARKS :

- # check distance between valve seal and retainer to be at least 0.6mm at full lift
- # if required, machine cylinder head and / or use solid shims to adjust spring load

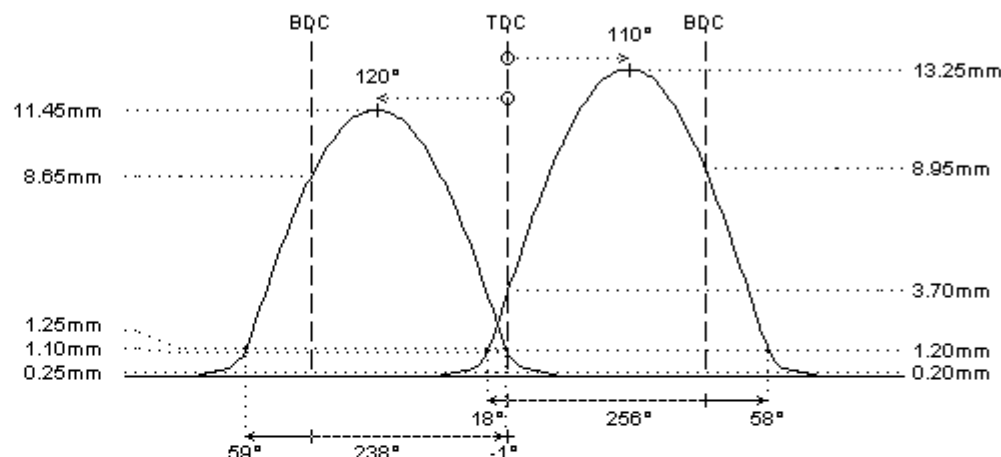

REMARKS :

- # - steel billet camshafts
- supplied with **adjustable chain sprockets** to optimize intake cam timing
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors