

1004155

hot street - dirt track

Audi AJG 163hp

V-6cyl 2.4L 30v DOHC (DTH/DTH)



intake exhaust

camshaft data:

lash ramp	: 0.20mm	0.25mm
duration @ 0.1mm	: 282°	278°
duration @ 1.0mm	: 240°	230°
valve lift	: 10.20mm	11.00mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 14° / 46°	41° / 9°
valve lift @ TDC	: 2.55mm	2.35mm


parts setup:

cam wheels :	:	:
follower	: CC016	: CC019
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90013	: PAC-E92009
interior spring	:	: PAC-I92009

fitted load / length	: 23kg @ 34.6mm	: 34kg @ 33.1mm
max. load / lift	: 68kg @ 12.0mm	: 96kg @ 12.5mm

REMARKS :

check distance between valve seal and retainer to be at least 0.6mm at full lift

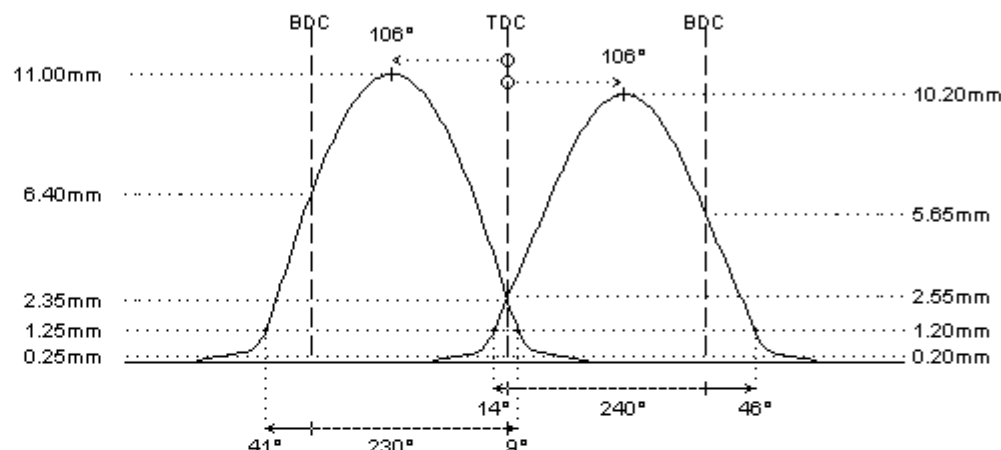

REMARKS :

- # - steel billet camshafts
- supplied with **adjustable chain sprockets** to optimize intake cam timing
- # This is a very complex engine with 4 different camshafts, moreover several evolutions have been released. These camshafts should only be purchased by experienced professionals who have the tools, skills and patience for correct installation, verification and adjustment of the timing events.
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors
- # for ATMO engines