

1030911

hot street - dirt track

Alfa Romeo 190hp

V-6cyl 2.5L 24v QOHC (DTH/DTH)



intake


exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 264°	258°
duration @ 1.0mm	: 236°	230°
valve lift	: 11.15mm	10.65mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 12° / 44°	41° / 9°
valve lift @ TDC	: 2.55mm	2.05mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99860	: PAC-E99860
interior spring	: PAC-I99860	: PAC-I99860
fitted load / length	: 36kg @ 32.0mm	: 36kg @ 32.0mm
max. load / lift	: 105kg @ 13.0mm	: 105kg @ 13.0mm

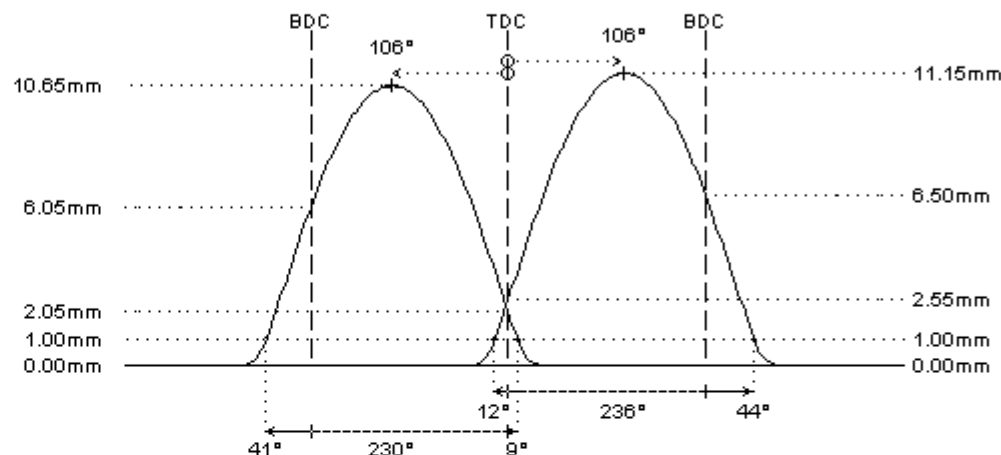

REMARKS :

- # - 10309xx: V6 2.5L 24v engines (narrow valve & lobe spacing)
- # - 10329xx: V6 3.0-3.2L 24v engines (wide valve & lobe spacing)
- steel billet camshafts
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

REMARKS :

- # check for clearance between inner valve spring and valve seal