


O.E.M.

Alfa Romeo 932A000 , 936A000 247hp Busso
V-6cyl 3.2L 24v QOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 254°	245°
duration @ 1.0mm	: 224°	214°
valve lift	: 9.30mm	9.25mm
cam lift	:	
lobe angle	: 109°	109°
timing @ 1.0mm	: 3° / 41°	36° / -2°
valve lift @ TDC	: 1.35mm	0.85mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 36kg @ 33.5mm	: 36kg @ 33.5mm
max. load / lift	: 72kg @ 11.0mm	: 72kg @ 11.0mm

REMARKS :

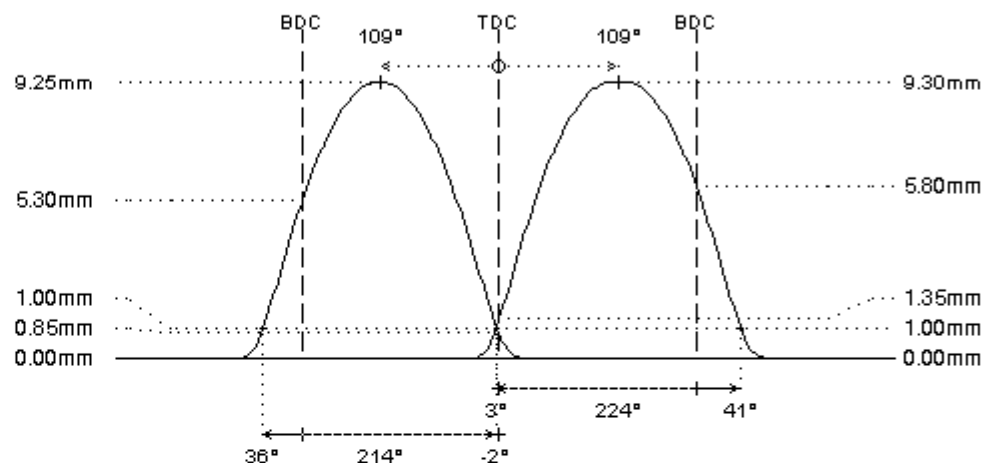

REMARKS :

- # - 10309xx: V6 2.5L 24v engines (narrow valve & lobe spacing)
- 10329xx: V6 3.0-3.2L 24v engines (wide valve & lobe spacing)
- steel billet camshafts