

1303750

tarmac rally - race


Bmw M62 B44 286hp, non vanos

V-8cyl 4.4L 32v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 284°	276°
duration @ 1.0mm	: 252°	244°
valve lift	: 10.75mm	10.00mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 20° / 52°	48° / 16°
valve lift @ TDC	: 3.50mm	2.95mm
parts setup:		
cam wheels :	:	:
follower	: CC002	: CC002
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

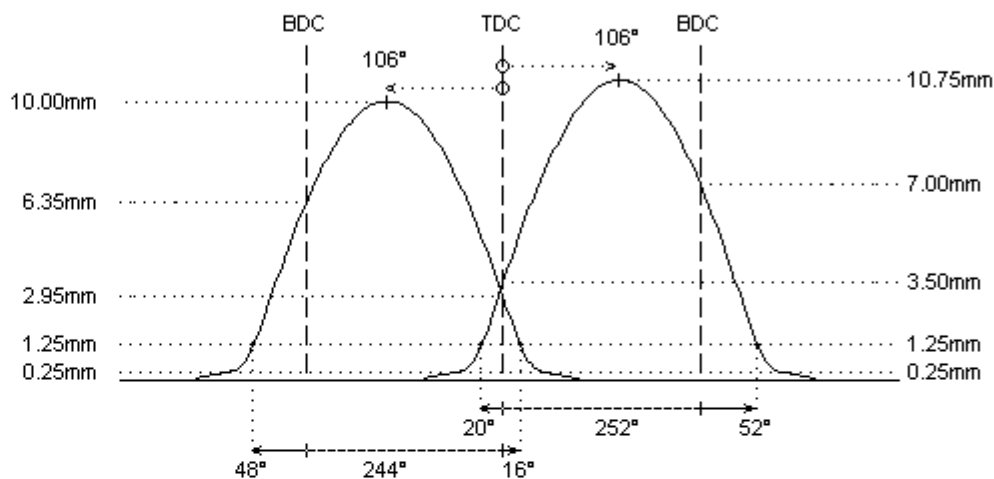

REMARKS :

- # - steel billet camshafts
- gundrilled for weight reduction
- # valve seals must be lowered, race valvespring kit is required (available on special request only)
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors