

O.E.M.

Bmw M62 B44 286hp, non vanos
V-8cyl 4.4L 32v DOHC (DTH/DTH)




	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 246°	240°
duration @ 1.0mm	: 202°	197°
valve lift	: 8.95mm	9.00mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -8° / 30°	29° / -12°
valve lift @ TDC	: 0.35mm	0.25mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

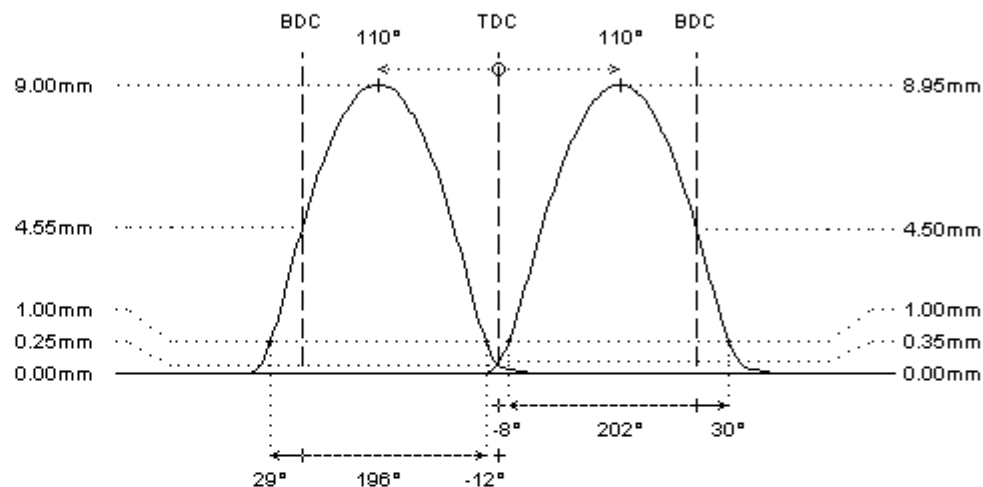

REMARKS :

- # - steel billet camshafts
- gundrilled for weight reduction