

1305601

sport

Bmw S85 B50 500hp

V-10cyl 5.0L 40v QOHC



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 292°	284°
duration @ 1.0mm	: 243°	235°
valve lift	: 12.00mm	11.75mm
cam lift	: 12.00mm	11.75mm
lobe angle	: 145°	128°
timing @ 1.0mm	: -24° / 87°	65° / -10°
valve lift @ TDC	: 0.00mm	0.35mm

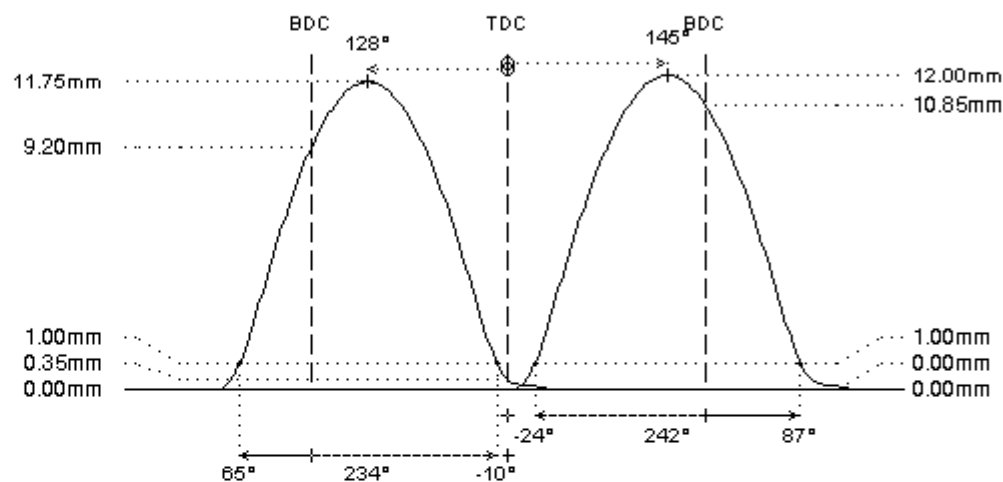
parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

**REMARKS :**

- # check std valve spring setup for coil bind length and use valve spring kit if required
- # Check distance between valves and piston to be 1mm at least with VVT engaged. Wrong installation will cause severe engine damage!