1321703


F.I.A.

Citroën TU5J4 120hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)

	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 264°	264°
duration @ 1.0mm	: 217°	217°
valve lift	: 8.85mm	8.85mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -1° / 38°	39° / -2°
valve lift @ TDC	: 0.95mm	0.85mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring		
fitted load / length	: 23kg @ 33.8mm	: 23kg @ 33.8mm
max. load / lift	: 63kg @ 10.0mm	: 63kg @ 10.0mm

REMARKS :

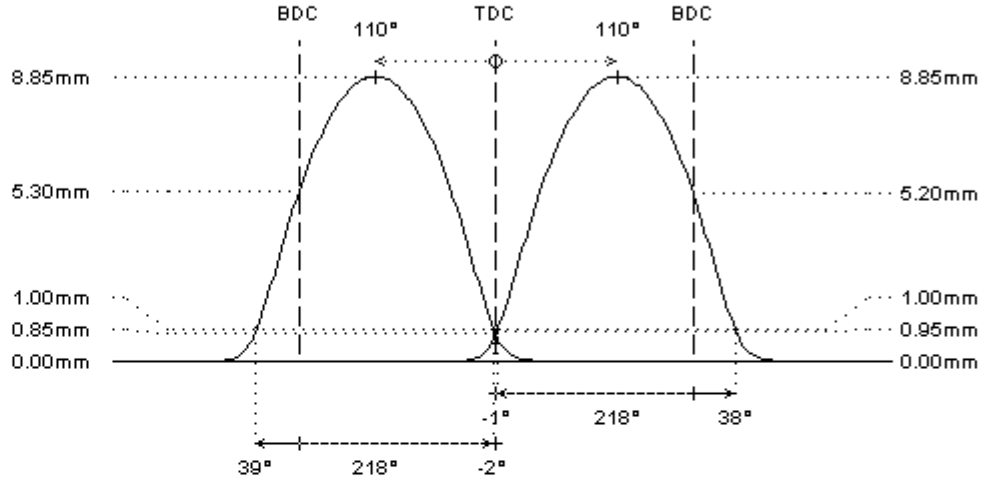

REMARKS :

FIA G.N. sheet nr. 5565 (A+B tol.)
When ordering please note if camshaft must meet all homologation measures