

1321719

F.I.A.

Citroën TU5J4 120hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)

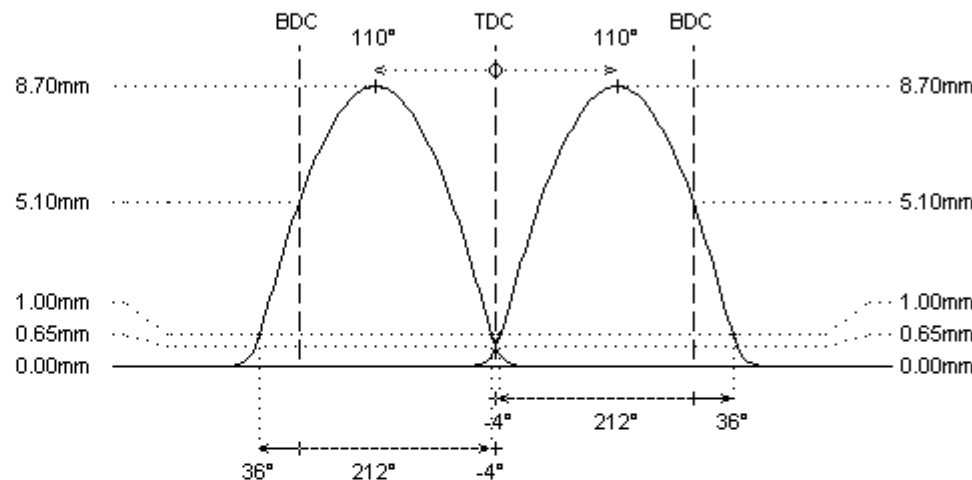


	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 247°	247°
duration @ 1.0mm	: 212°	212°
valve lift	: 8.70mm	8.70mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -4° / 36°	36° / -4°
valve lift @ TDC	: 0.65mm	0.65mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 23kg @ 33.8mm	: 23kg @ 33.8mm
max. load / lift	: 63kg @ 10.0mm	: 63kg @ 10.0mm

REMARKS :**REMARKS :**

FIA G.N. sheet nr. 5564 (A+B tol.)