

O.E.M.


Citroën TU5JP4 110hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 243°	237°
duration @ 1.0mm	: 199°	194°
valve lift	: 8.00mm	7.65mm
cam lift	:	
lobe angle	: 108°	102°
timing @ 1.0mm	: -8° / 27°	19° / -5°
valve lift @ TDC	: 0.40mm	0.60mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 23kg @ 34.0mm	: 23kg @ 34.0mm
max. load / lift	: 48kg @ 9.0mm	: 48kg @ 9.0mm

REMARKS :

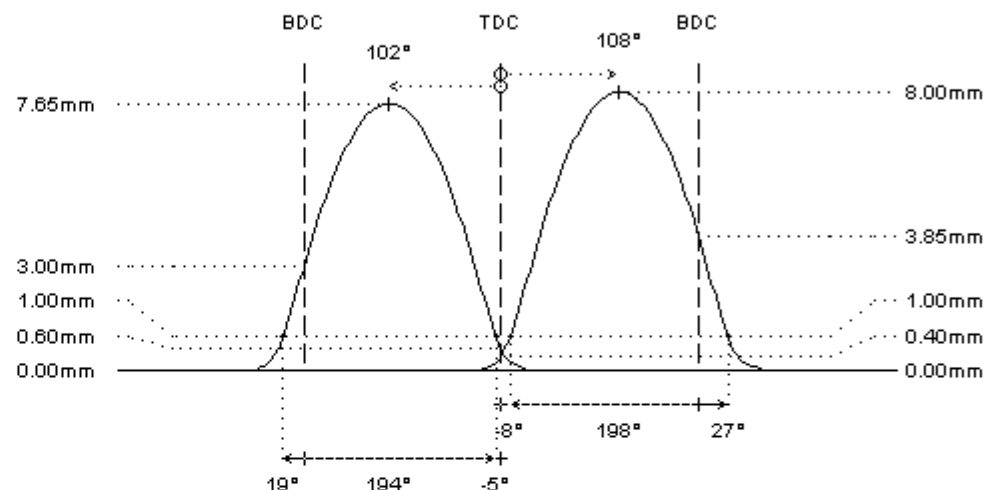

REMARKS :

STD camshaft specifications for Peugeot-Citroën TU5JP4/L4 engine (110hp)