

1323705

hot street - dirt track


Citroën TU5JP4S 125hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 262°	256°
duration @ 1.0mm	: 236°	228°
valve lift	: 10.45mm	10.00mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 10° / 46°	42° / 6°
valve lift @ TDC	: 2.15mm	1.65mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99311/s	: 99311/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:
fitted load / length	: 31kg @ 37.5mm	: 31kg @ 37.5mm
max. load / lift	: 79kg @ 12.5mm	: 79kg @ 13.0mm

REMARKS :

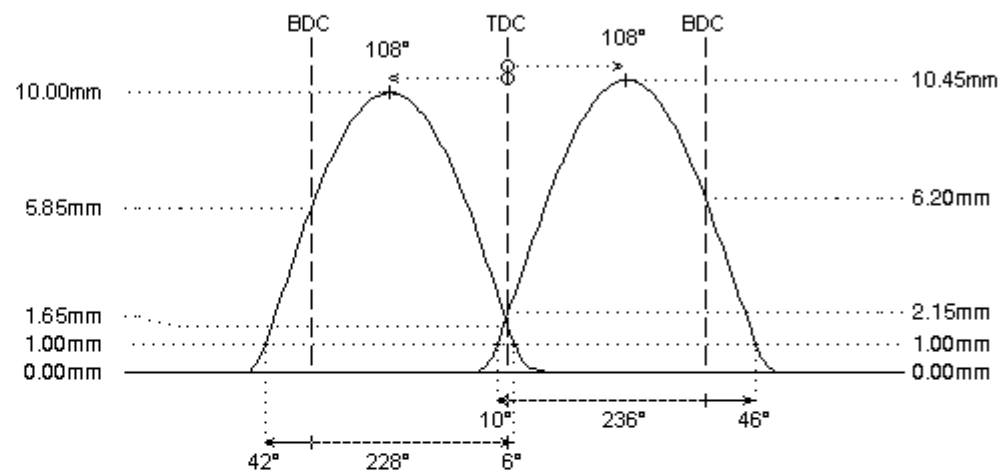

REMARKS :

- # Distance between valve and piston should be 1.0mm at least:
 - check 5-15° after TDC on intake
 - check 5-15° before TDC on exhaustMachine pistons if required. Wrong installation can cause severe engine damage!
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors