

1601214

hot street - dirt track


Nissan CG13DE

I-4cyl 1.3L 16v DOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 270°	270°
duration @ 1.0mm	: 224°	224°
valve lift	: 9.50mm	9.50mm
cam lift	: 9.50mm	9.50mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 4° / 40°	40° / 4°
valve lift @ TDC	: 1.65mm	1.65mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	PAC-E99862	PAC-E99862
interior spring :		
fitted load / length	: 31kg @ 34.5mm	: 31kg @ 34.5mm
max. load / lift	: 82kg @ 12.0mm	: 82kg @ 12.0mm

REMARKS :

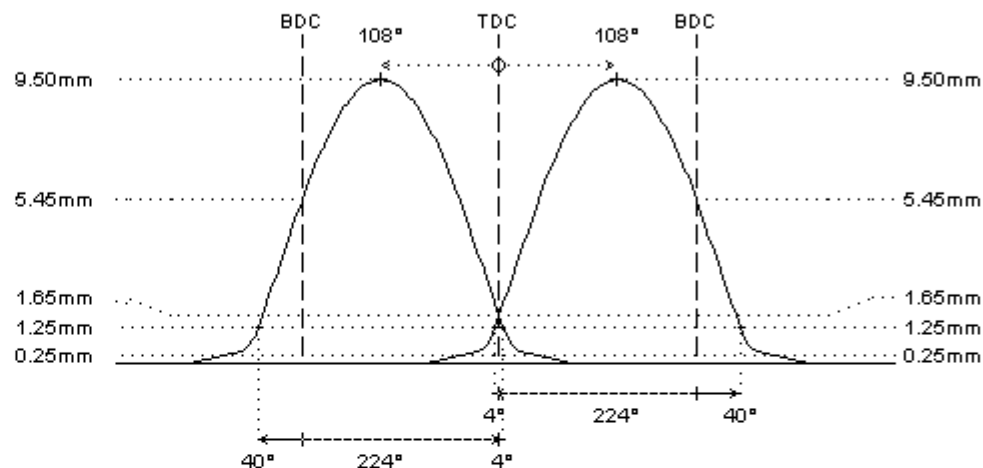

REMARKS :

ONLY for dirt track applications and pro street use with adjustable engine management or carburetors