

1900200

sport

Fiat 128 128

I-4cyl 1.3L 8v SOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 280°	280°
duration @ 1.0mm	: 244°	244°
valve lift	: 10.65mm	10.65mm
cam lift	: 10.65mm	10.65mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 12° / 52°	52° / 12°
valve lift @ TDC	: 2.50mm	2.50mm

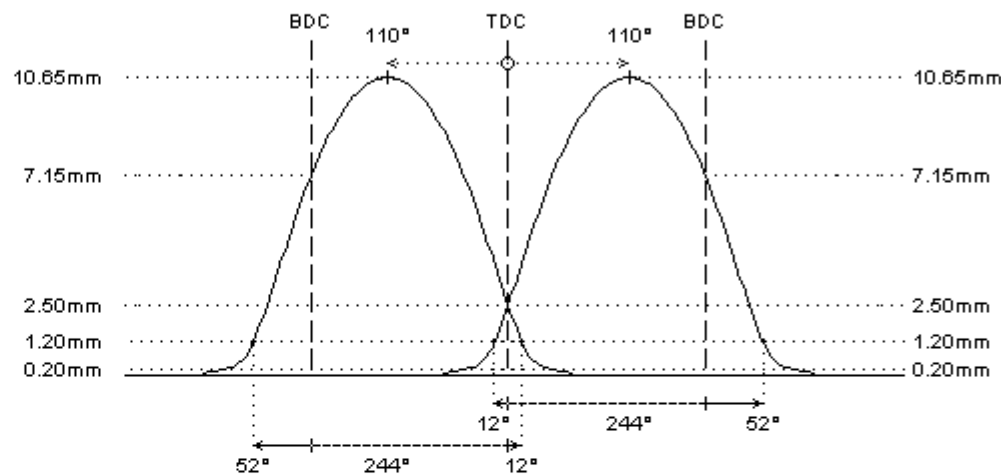
parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

**REMARKS :**

- # All camshafts have sleeve for distributor drive. X1/9 type camshafts with spline drive are NOT available
- # sport version for Fiat128 and for OEM camshafts from 9mm to 9.7mm OEM camlift.