

1900423

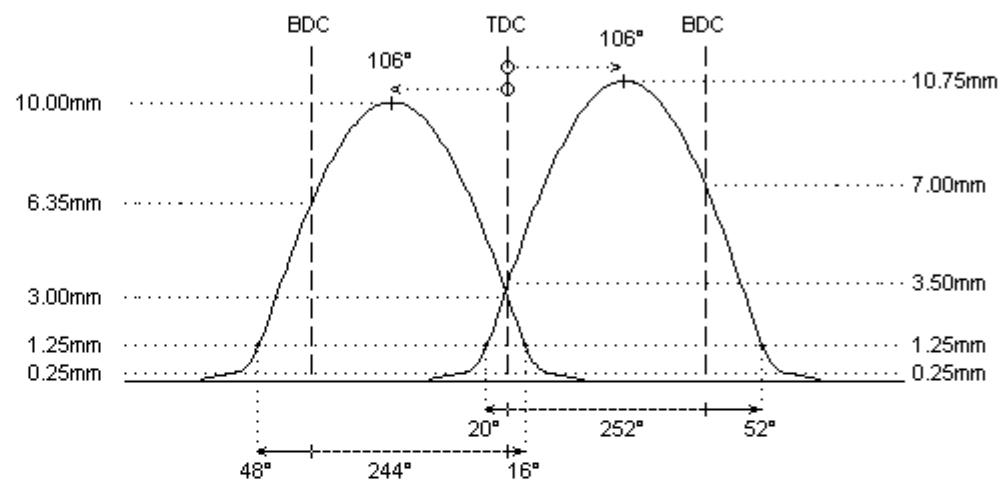
hot street - dirt track

Fiat 836 A3.000 Fiat Tipo 16v + Lancia Delta integrale

I-4cyl 2.0L 16v DOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 284°	276°
duration @ 1.0mm	: 252°	244°
valve lift	: 10.75mm	10.00mm
cam lift	: 10.75mm	10.00mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 20° / 52°	48° / 16°
valve lift @ TDC	: 3.50mm	3.00mm
parts setup:		
cam wheels :	: CTFI036	: CTFI035
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 53kg @ 34.7mm	: 53kg @ 34.7mm
max. load / lift	: 95kg @ 10.5mm	: 95kg @ 10.5mm

**REMARKS :**

- # These camshafts can also be used in:
160 A5.000 (1756cc) / 154 E1.000 (1995cc) / M607 AA.18.0 (1995cc) / M619 AA2.0 (1995cc turbo)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake

REMARKS :