

# 1900643

sport

Fiat A112 2.000

I-4cyl 1.0L 8v OHV (FT/FT)



**intake**                      **exhaust**

**camshaft data:**


|                  |            |          |
|------------------|------------|----------|
| lash ramp        | : 0.35mm   | 0.35mm   |
| duration @ 0.1mm | : 280°     | 280°     |
| duration @ 1.0mm | : 230°     | 230°     |
| valve lift       | : 9.80mm   | 9.80mm   |
| cam lift         | : 7.00mm   | 7.00mm   |
| lobe angle       | : 108°     | 108°     |
| timing @ 1.0mm   | : 7° / 43° | 43° / 7° |
| valve lift @ TDC | : 2.05mm   | 2.05mm   |

**parts setup:**

|                   |          |          |
|-------------------|----------|----------|
| cam wheels :      | :        | :        |
| follower :        | 🔍 CAT050 | 🔍 CAT050 |
| valve lash :      | O.E.M.   | O.E.M.   |
| valve :           | O.E.M.   | O.E.M.   |
| valve locks :     | O.E.M.   | O.E.M.   |
| upper retainer :  | O.E.M.   | O.E.M.   |
| lower retainer :  | O.E.M.   | O.E.M.   |
| exterior spring : | O.E.M.   | O.E.M.   |
| interior spring : | O.E.M.   | O.E.M.   |

|                      |                |                |
|----------------------|----------------|----------------|
| fitted load / length | : 0kg @ 37.3mm | : 0kg @ 37.3mm |
| max. load / lift     | : 0kg @ 10.0mm | : 0kg @ 10.0mm |

**REMARKS :**

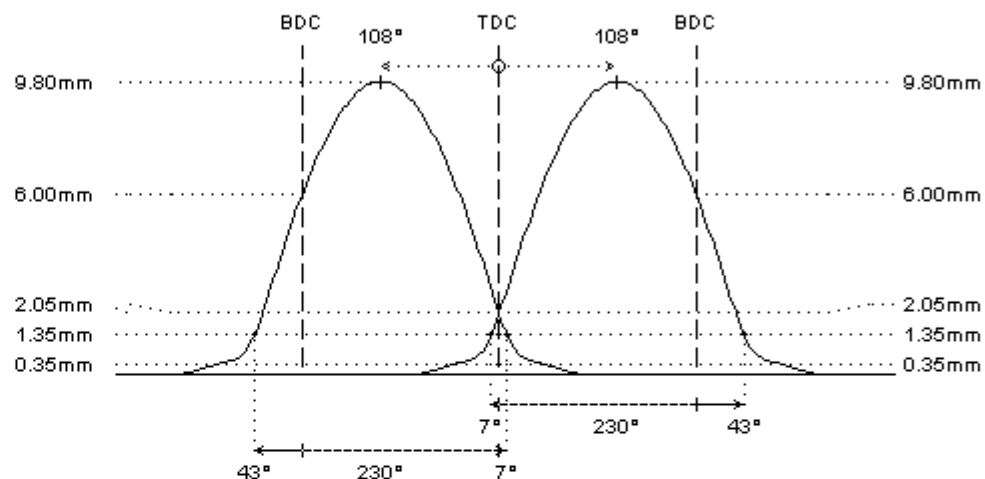

**REMARKS :**

- # - bearing diameters: 38.00 - 43.35 - 31.00mm
- indicate when cam core must be undercut for connection rod clearance (Abarth)