

1900727

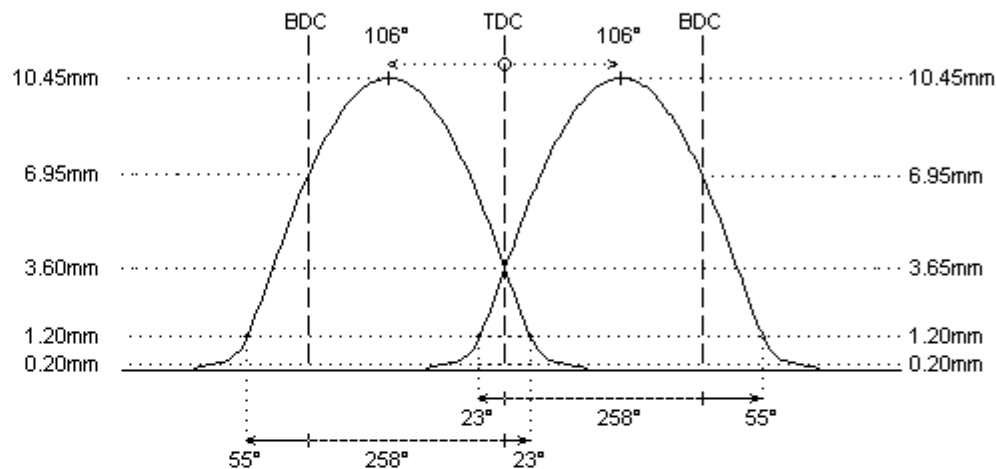
tarmac rally - race

Fiat 156.A2.100 fire (55hp)

I-4cyl 1.0L 8v SOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 300°	300°
duration @ 1.0mm	: 258°	258°
valve lift	: 10.45mm	10.45mm
cam lift	: 10.45mm	10.45mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 23° / 55°	55° / 23°
valve lift @ TDC	: 3.65mm	3.60mm
parts setup:		
cam wheels :	: CTFI030	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99413	: 99413
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009
fitted load / length	: 37kg @ 33.5mm	: 37kg @ 33.5mm
max. load / lift	: 101kg @ 13.0mm	: 101kg @ 13.0mm

**REMARKS :**

steel billet camshafts

REMARKS :