

O.E.M.

Ford Zeta 1.8 - 2.0L, mech (blacktop)

I-4cyl 2.0L 16v DOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 253°	243°
duration @ 1.0mm	: 215°	204°
valve lift	: 9.40mm	8.70mm
cam lift	: 9.40mm	8.70mm
lobe angle	: 113°	113°
timing @ 1.0mm	: -5° / 40°	35° / -11°
valve lift @ TDC	: 0.85mm	0.60mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 14kg @ 35.0mm	: 14kg @ 35.0mm
max. load / lift	: 37kg @ 11.0mm	: 37kg @ 11.0mm

REMARKS :

- # original setup with conical valve springs
- # original springs not suited for extended rpm range

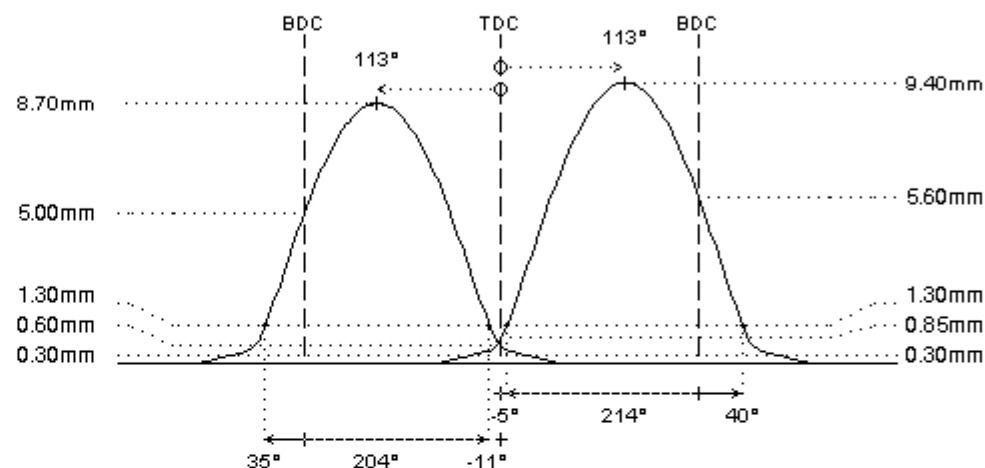

REMARKS :

- # for 2nd generation engines with mechanic tappets 30mm / shim 27.5mm on top, tripple groove valves and conical valve springs (from '98)