

2291103

hot street - dirt track

Ford ZH12 Sigma

I-4cyl 1.2L 16v DOHC (DTs/DTs)




	intake	exhaust
camshaft data:		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 244°	244°
duration @ 1.0mm	: 206°	206°
valve lift	: 7.65mm	7.65mm
cam lift	: 7.65mm	7.65mm
lobe angle	: 108°	102°
timing @ 1.0mm	: -4° / 30°	26° / -0°
valve lift @ TDC	: 0.95mm	1.30mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 22kg @ 36.0mm	: 22kg @ 36.0mm
max. load / lift	: 39kg @ 11.5mm	: 39kg @ 11.5mm

REMARKS :

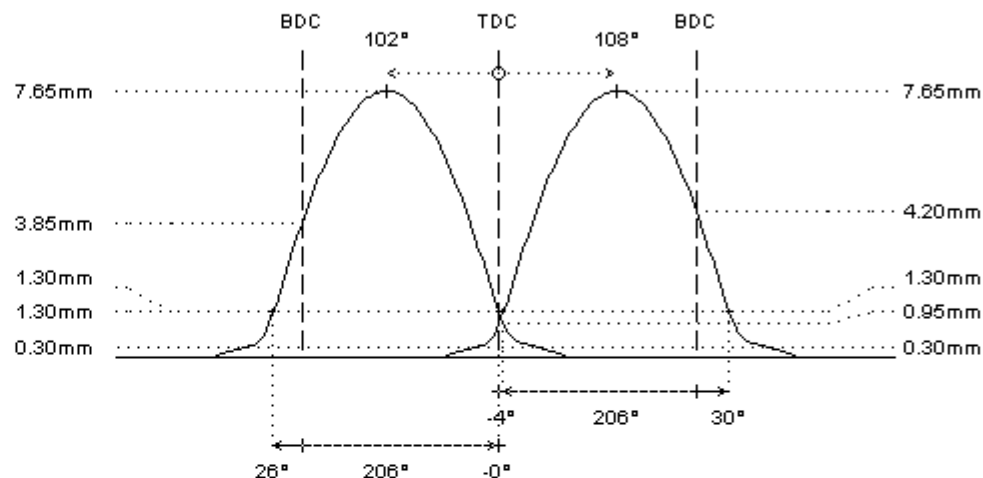

REMARKS :

- # for engines with 28mm cam followers / 25mm lash adjustment shims (between cam and follower), please contact Cat Cams if different
- # ECU reprogramming required