

2503607

full race

Honda B16A

I-4cyl 1.6L 16v DOHC (RP/RP)



intake

exhaust

camshaft data:

lash ramp	: 0.28mm	0.28mm
duration @ 0.1mm	: 304°	296°
duration @ 1.0mm	: 268°	260°
valve lift	: 14.50mm	13.75mm
cam lift	: 9.10mm	8.70mm
lobe angle	: 105°	105°
timing @ 1.0mm	: 29° / 59°	55° / 25°
valve lift @ TDC	: 5.45mm	4.75mm


parts setup:

cam wheels :	: CTH0110	: CTH0110
follower	: INFO	: INFO
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99375/s	: 99375/s
lower retainer	: remove	: remove
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009

fitted load / length	: 32kg @ 34.0mm	: 32kg @ 34.0mm
max. load / lift	: 104kg @ 14.5mm	: 104kg @ 14.5mm

REMARKS :

- # 16x CAT023 rocker arm
- # 8x CAT023-R 23 spacer

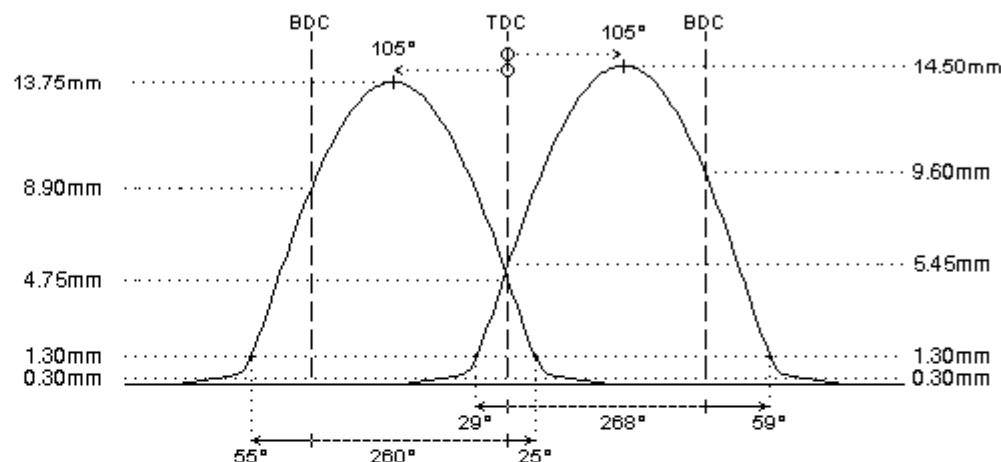

REMARKS :

- # - VTEC Eliminator system
- extra long contact area for higher lift / duration ratio
- coated billet rocker arms
- mass of 60gr only (without screw) - 35gr at valve tip
- Leave the VTEC solenoid constantly in the "VTEC ON" position (high oil pressure) to allow sufficient oil supply to the complete cylinder head.
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors
- # valve seals must be lowered, race valvespring kit is required (available on special request only)