

O.E.M.

Hyundai 160hp / 230Nm

V-6cyl 2.5L 24v DOHC (DTH/DTH)




	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 239°	234°
duration @ 1.0mm	: 181°	181°
valve lift	: 8.05mm	8.05mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -20° / 21°	20° / -19°
valve lift @ TDC	: 0.10mm	0.20mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 21kg @ 34.5mm	: 21kg @ 34.0mm
max. load / lift	: 49kg @ 10.0mm	: 49kg @ 10.0mm

REMARKS :

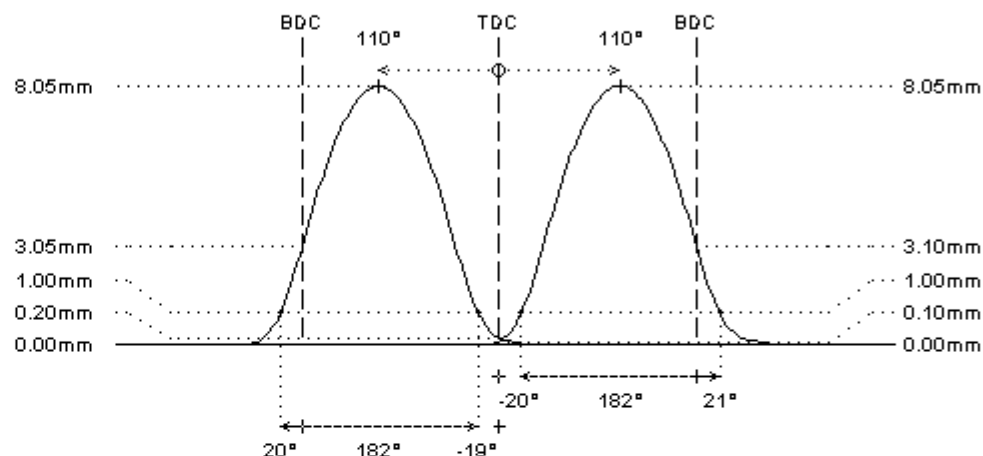

REMARKS :

- # The exact valve timing data of the original camshafts are not known. Valve timing data are illustrated on estimated peak angle of 110°. The actual valve timing in the engine may be different, as well as the indicated lift at TDC.