

3701208

tarmac rally - race

Mazda B6 /turbo hydraulic cam followers

I-4cyl 1.6L 16v DOHC (DTH/DTH)

**intake****exhaust****camshaft data:**

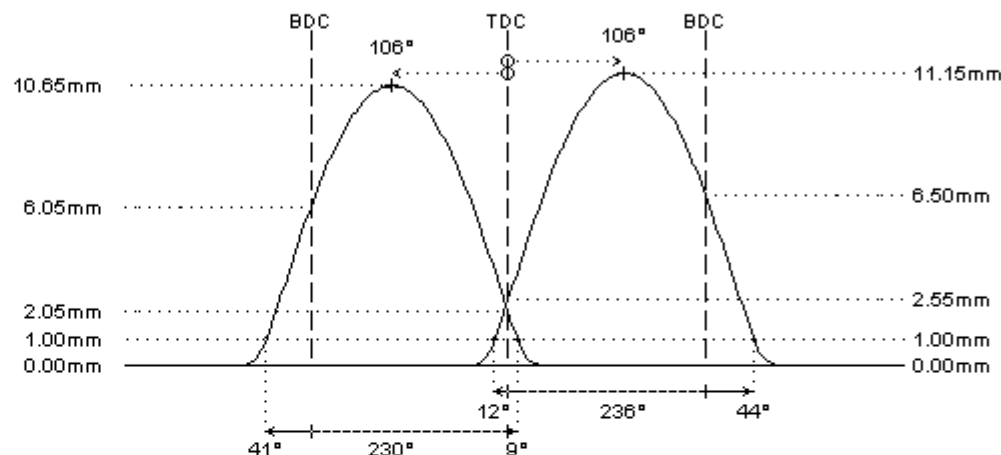
lash ramp	: hydro	hydro
duration @ 0.1mm	: 264°	258°
duration @ 1.0mm	: 236°	230°
valve lift	: 11.15mm	10.65mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 12° / 44°	41° / 9°
valve lift @ TDC	: 2.55mm	2.05mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:
fitted load / length	: 25kg @ 39.5mm	: 25kg @ 39.5mm
max. load / lift	: 73kg @ 13.0mm	: 73kg @ 13.0mm

REMARKS :

if required, use extra shims to increase spring load

**REMARKS :**

- # camshafts for use in 1598cc B6 engines:
 - long intake camshaft with sleeve for distributor drive
 - short exhaust camshaft
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors