

3702302

sport

Mazda B6 NB (solid cam followers)

I-4cyl 1.6L 16v DOHC (DTs/DTs)




	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.35mm
duration @ 0.1mm	: 244°	248°
duration @ 1.0mm	: 208°	206°
valve lift	: 8.75mm	8.50mm
cam lift	: 8.75mm	8.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: -6° / 34°	33° / -7°
valve lift @ TDC	: 0.75mm	0.80mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 20kg @ 39.5mm	: 20kg @ 39.5mm
max. load / lift	: 57kg @ 10.0mm	: 57kg @ 10.0mm

REMARKS :

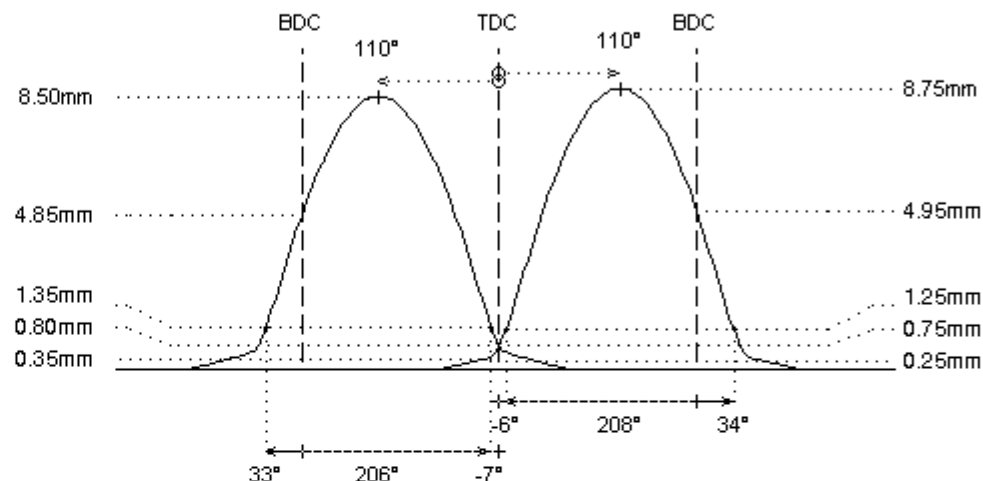

REMARKS :

- # For later B6 engine (MX5 NB) with 30mm solid cam followers (27mm shims on top)
- # ECU reprogramming advised