

4003617

tarmac rally - race


Mercedes M113.987 .987 .988 .989
V-8cyl 5.4L 24v SOHC (RPRH/RPRH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 314°	314°
duration @ 1.0mm	: 252°	252°
valve lift	: 12.75mm	12.75mm
cam lift	: 8.90mm	8.90mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 16° / 56°	56° / 16°
valve lift @ TDC	: 2.80mm	2.80mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99572	: 99572
lower retainer	: 99593/O	: 99593/O
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009
fitted load / length	: 35kg @ 34.0mm	: 35kg @ 34.0mm
max. load / lift	: 104kg @ 14.0mm	: 104kg @ 14.0mm

REMARKS :

machining of cylinder head required

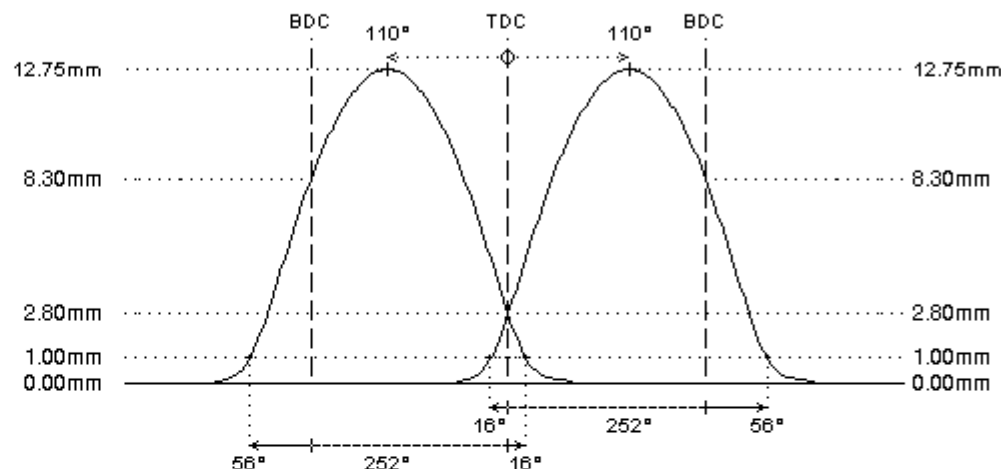

REMARKS :

- # OEM data for M113.987 .988 .989
camshaft partnumber:
A113 050 89 01
A113 050 90 01
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors