

4013303


hot street - dirt track

Mercedes M133.980 A45 AMG

I-4cyl 2.0L 16v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 280°	280°
duration @ 1.0mm	: 224°	224°
valve lift	: 11.50mm	11.50mm
cam lift	: 5.80mm	5.80mm
lobe angle	: 120°	126°
timing @ 1.0mm	: -8° / 52°	58° / -14°
valve lift @ TDC	: 0.45mm	0.25mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99650/S	: 99650/S
lower retainer	: 99649/O	: 99649/O
exterior spring	: PAC-E99864	: PAC-E99864
interior spring	: PAC-I99864	: PAC-I99864
fitted load / length	: 35kg @ 32.0mm	: 35kg @ 34.9mm
max. load / lift	: 85kg @ 12.0mm	: 85kg @ 12.0mm

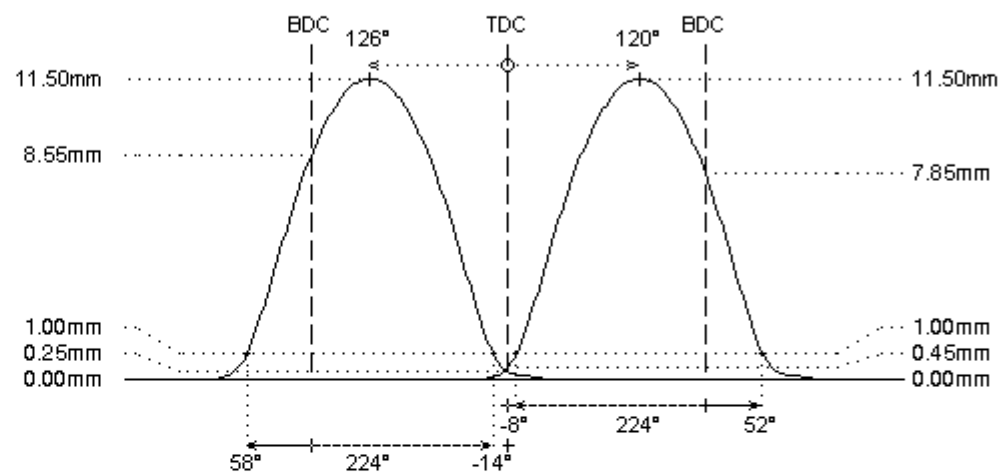

REMARKS :

- # billet steel cams including cam trigger wheels
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

REMARKS :