4601309


hot street - dirt track

Opel C30SE 197hp

I-6cyl 3.0L 24v DOHC (DTH/DTH)

	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 282°	271°
duration @ 1.0mm	: 242°	230°
valve lift	: 9.70mm	9.75mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: 11° / 51°	45° / 5°
valve lift @ TDC	: 2.05mm	1.50mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring		
fitted load / length	: 28kg @ 33.8mm	: 28kg @ 33.8mm
max. load / lift	: 72kg @ 10.5mm	: 72kg @ 10.5mm

REMARKS :

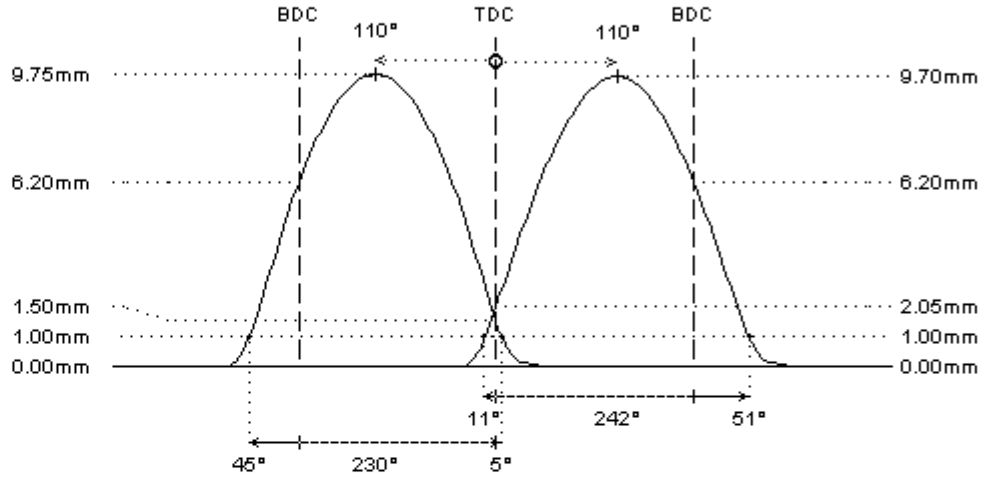

REMARKS :

\# ONLY for dirt track applications and pro street use with adjustable engine management or carburettors