

# 4602705


hot street - dirt track

Opel X25XE 170hp

V-6cyl 2.5L 24v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 274°	274°
duration @ 1.0mm	: 236°	236°
valve lift	: 10.95mm	10.95mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 10° / 46°	46° / 10°
valve lift @ TDC	: 2.25mm	2.20mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-S90019	:  PAC-S90019
interior spring	:	:
fitted load / length	: 36kg @ 34.0mm	: 36kg @ 34.0mm
max. load / lift	: 82kg @ 11.5mm	: 82kg @ 11.5mm

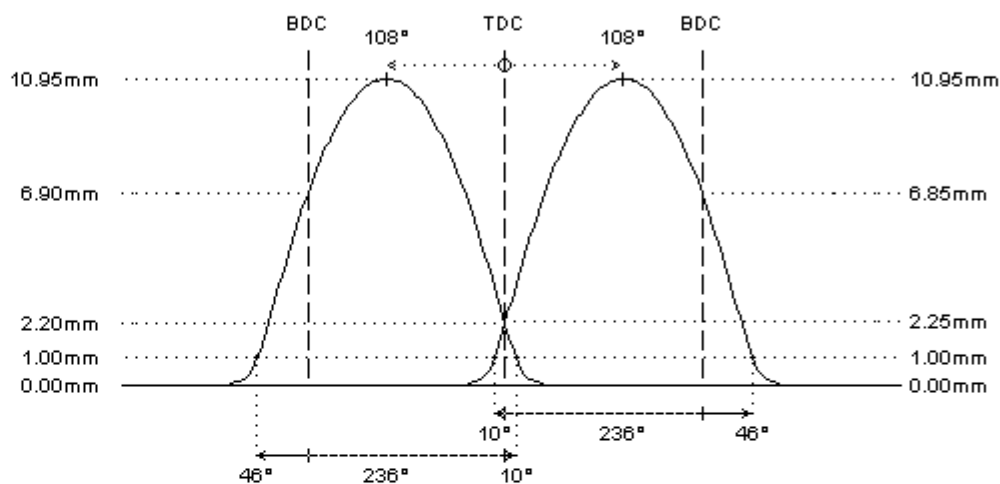

### REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

### REMARKS :

- # check distance between valve seal and retainer to be at least 0.6mm at full lift