

4610808

hot street - dirt track

Opel C20XE without distributor (DIS)

I-4cyl 2.0L 16v DOHC (DTH/DTH)



intake **exhaust**

camshaft data:

lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 293°	284°
duration @ 1.0mm	: 246°	238°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 51°	47° / 11°
valve lift @ TDC	: 3.15mm	2.60mm


parts setup:

cam wheels :	: CTOP031	: CTOP031
follower	: CC004	: CC004
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99341	: 99341
lower retainer	: remove	: remove
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009

fitted load / length	: 33kg @ 33.5mm	: 33kg @ 33.5mm
max. load / lift	: 96kg @ 12.5mm	: 96kg @ 12.5mm

REMARKS :

replace OEM lower retainer to obtain a correct installation / fitted length (currently not available)

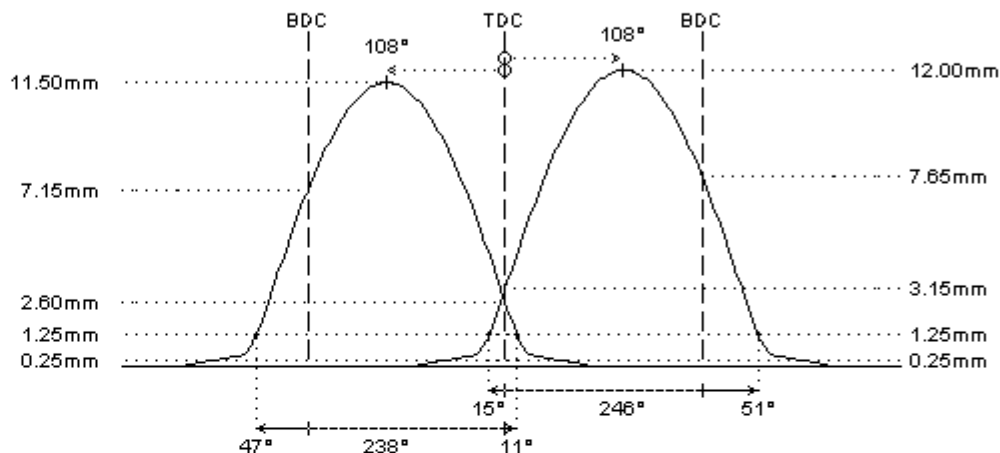

REMARKS :

- # - profiles for conversion to mechanic race cam followers
- camshafts available in cast iron or optional gundrilled steel billet (short competition version without distributor drive end)
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
- the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
- distance between valve seal and retainer at full lift must be 0.6mm at least
- minimum valve spring travel of 1.0mm at full lift must be provided
- distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors