

O.E.M.

Citroën XU5J (180A)

I-4cyl 1.6L 8v SOHC (DT/DT)




	intake	exhaust
camshaft data:		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 276°	276°
duration @ 1.0mm	: 215°	215°
valve lift	: 9.75mm	9.75mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: -1° / 36°	35° / -0°
valve lift @ TDC	: 1.20mm	1.30mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	

fitted load / length	: 42kg @ 39.8mm	: 44kg @ 39.3mm
max. load / lift	: 85kg @ 12.0mm	: 85kg @ 11.5mm

REMARKS :

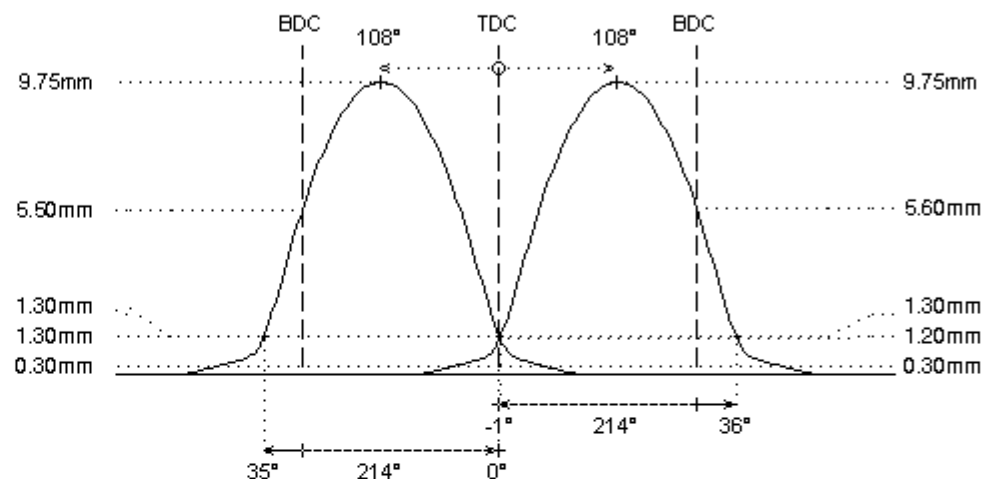

REMARKS :

with fuel pump lobe