


B-6cyl 3.0L 12v SOHC



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.25mm
duration @ 0.1mm	: 275°	259°
duration @ 1.0mm	: 233°	223°
valve lift	: 11.45mm	10.00mm
cam lift	: 7.75mm	6.90mm
lobe angle	: 116°	111°
timing @ 1.0mm	: -0° / 53°	41° / 2°
valve lift @ TDC	: 1.15mm	1.35mm

cam wheels :	:	:	:
follower	:	O.E.M.	O.E.M.
valve lash	:	O.E.M.	O.E.M.
valve	:	O.E.M.	O.E.M.
valve locks	:	O.E.M.	O.E.M.
upper retainer	:	O.E.M.	O.E.M.
lower retainer	:	O.E.M.	O.E.M.
exterior spring	:	O.E.M.	O.E.M.
interior spring	:		

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

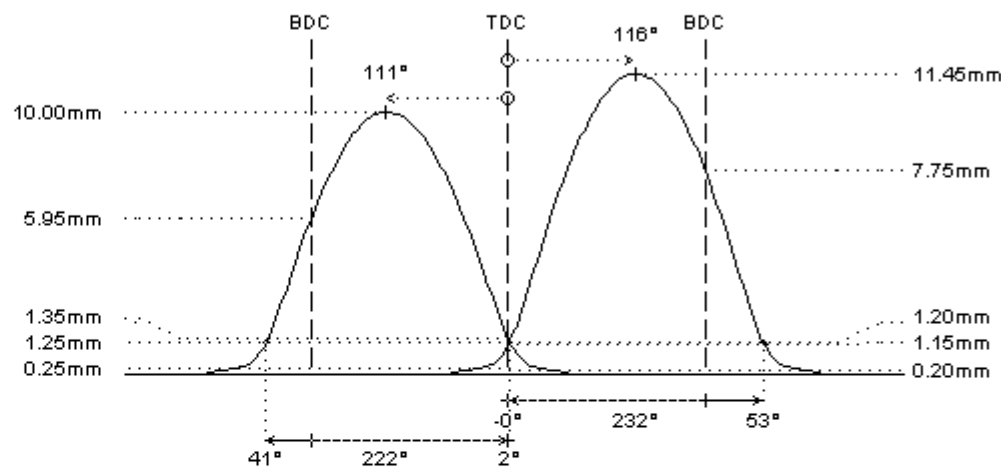

REMARKS :