

O.E.M.

Renault K4M.708 M@ane I 1600 16v  
I-4cyl 1.6L 16v DOHC (RPRH/RPRH)




|                       | intake       | exhaust  |
|-----------------------|--------------|----------|
| <b>camshaft data:</b> |              |          |
| lash ramp             | : hydro      | hydro    |
| duration @ 0.1mm      | : 238°       | 229°     |
| duration @ 1.0mm      | : 189°       | 182°     |
| valve lift            | : 9.15mm     | 7.95mm   |
| cam lift              | : 4.65mm     | 4.05mm   |
| lobe angle            | : 105°       | 96°      |
| timing @ 1.0mm        | : -11° / 20° | 7° / -5° |
| valve lift @ TDC      | : 0.30mm     | 0.65mm   |

**parts setup:**

|                 |          |          |
|-----------------|----------|----------|
| cam wheels :    | :        | :        |
| follower        | : O.E.M. | : O.E.M. |
| valve lash      | : O.E.M. | : O.E.M. |
| valve           | : O.E.M. | : O.E.M. |
| valve locks     | : O.E.M. | : O.E.M. |
| upper retainer  | : O.E.M. | : O.E.M. |
| lower retainer  | : O.E.M. | : O.E.M. |
| exterior spring | : O.E.M. | : O.E.M. |
| interior spring | :        | :        |

|                      |                 |                 |
|----------------------|-----------------|-----------------|
| fitted load / length | : 20kg @ 34.5mm | : 20kg @ 34.5mm |
| max. load / lift     | : 66kg @ 11.0mm | : 66kg @ 11.0mm |

REMARKS :

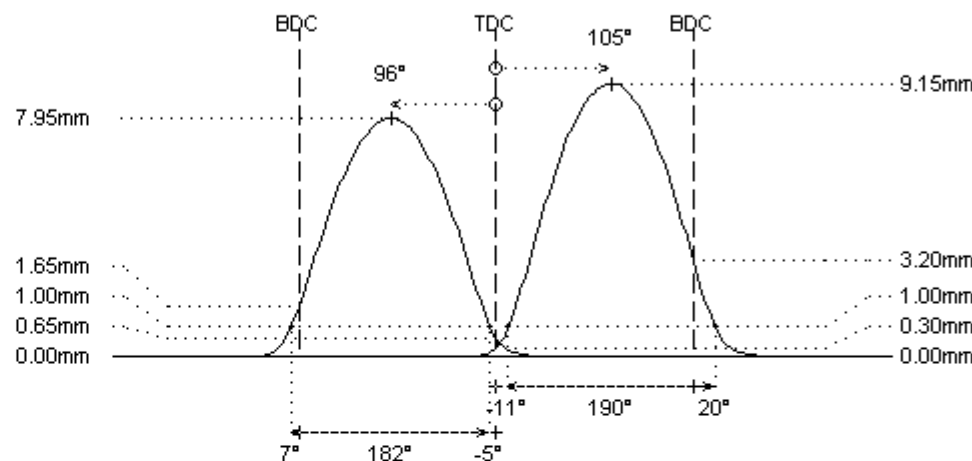

REMARKS :