

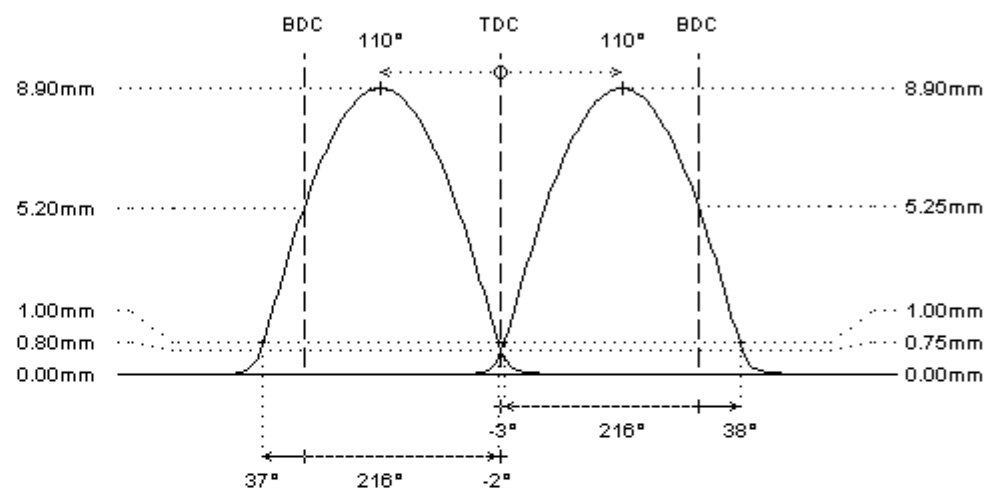
5800411

F.I.A.

Rover K series



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 257°	257°
duration @ 1.0mm	: 215°	215°
valve lift	: 8.90mm	8.90mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -3° / 38°	37° / -2°
valve lift @ TDC	: 0.75mm	0.80mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		
fitted load / length	: 25kg @ 37.5mm	: 25kg @ 37.5mm
max. load / lift	: 55kg @ 11.0mm	: 55kg @ 11.0mm

REMARKS :**REMARKS :**

FIA Gr.N. (A+B size only). Please indicate if this camshaft will be used for Gr.N. when ordering.

machining of cylinder head can be required at camlobes