

6100202

turbo conversion

Saab 900, 9000

I-4cyl 2.0L 16v DOHC (DTH/DTH)

**intake****exhaust****camshaft data:**

lash ramp	: hydro	hydro
duration @ 0.1mm	: 274°	242°
duration @ 1.0mm	: 236°	212°
valve lift	: 10.95mm	9.70mm
cam lift	:	
lobe angle	: 112°	112°
timing @ 1.0mm	: 6° / 50°	38° / -6°
valve lift @ TDC	: 1.75mm	0.50mm

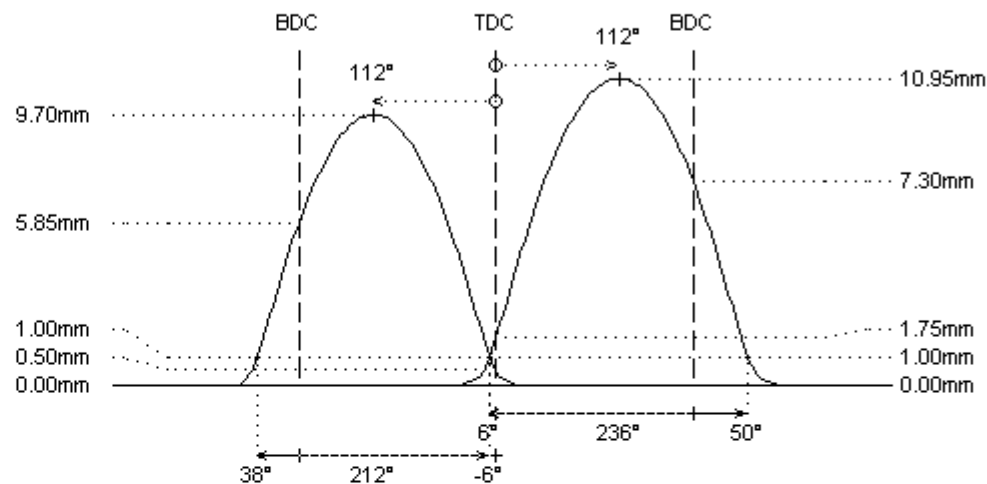
parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	99341	99341
lower retainer :	✗ remove	✗ remove
exterior spring :	PAC-E92009	PAC-E92009
interior spring :	PAC-I92009	PAC-I92009

fitted load / length	: 35kg @ 33.0mm	: 35kg @ 33.0mm
max. load / lift	: 97kg @ 12.5mm	: 97kg @ 12.5mm

REMARKS :

if required, machine cylinder head and / or use solid shims to adjust spring load

**REMARKS :**

ONLY for dirt track applications and pro street use with adjustable engine management or carburetors