


O.E.M.

Suzuki G13B 100hp

I-4cyl 1.3L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 232°	244°
duration @ 1.0mm	: 197°	203°
valve lift	: 7.50mm	7.50mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: -7° / 24°	27° / -4°
valve lift @ TDC	: 0.50mm	0.70mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		
fitted load / length	: 33kg @ 42.0mm	: 33kg @ 42.0mm
max. load / lift	: 80kg @ 10.0mm	: 80kg @ 10.0mm

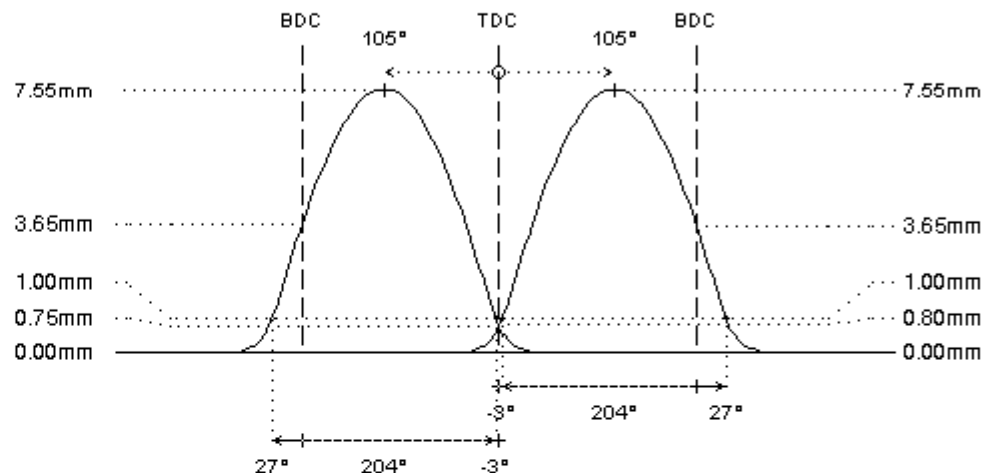

REMARKS :

- # - steel billet camshafts
- please carefully read about the different valve spring options

REMARKS :