

O.E.M.

Toyota 7M-GTE

I-6cyl 3.0L 24v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 245°	244°
duration @ 1.0mm	: 201°	201°
valve lift	: 7.55mm	7.50mm
cam lift	: 7.55mm	7.55mm
lobe angle	: 112°	115°
timing @ 1.0mm	: -12° / 33°	35° / -14°
valve lift @ TDC	: 0.50mm	0.45mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 16kg @ 35.0mm	: 16kg @ 35.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

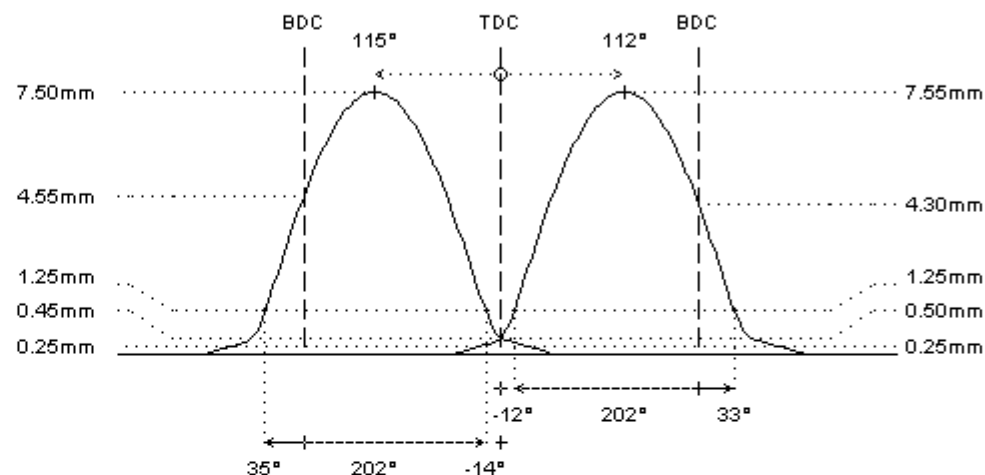

REMARKS :

These profiles are designed to run on 28mm tappets with 25mm shims, dedicated profiles for other cam follower setups are available as well