

7300429

tarmac rally - race

Triumph TR6PI TR6

I-6cyl 2.0L 12v SOHC (FT/FT)



intake exhaust

camshaft data:


lash ramp	: 0.45mm	0.45mm
duration @ 0.1mm	: 317°	317°
duration @ 1.0mm	: 278°	278°
valve lift	: 12.75mm	12.75mm
cam lift	: 12.75mm	12.75mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 33° / 65°	65° / 33°
valve lift @ TDC	: 5.25mm	5.25mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: ✗ not available	: ✗ not available
lower retainer	: ✗ not available	: ✗ not available
exterior spring	: ✗ not available	: ✗ not available
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

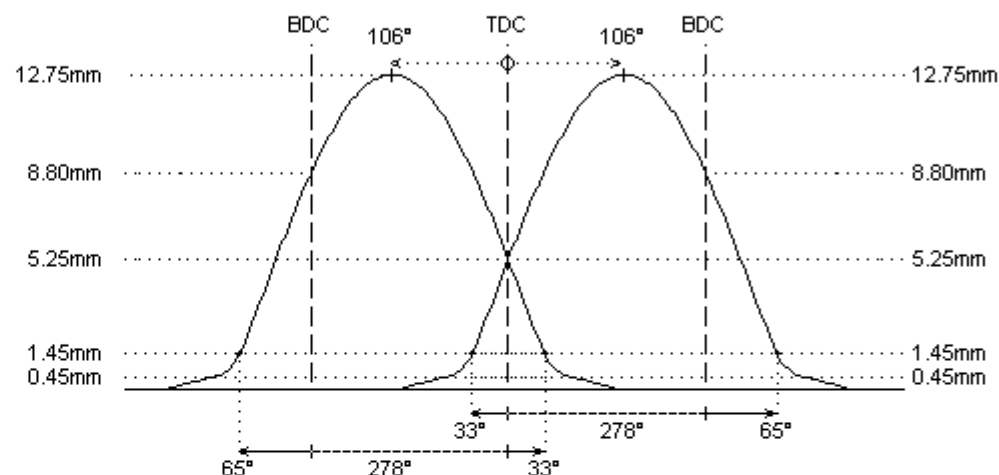

REMARKS :

- # camshafts are ground on new blanks
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors