

7604503


hot street - dirt track

Volkswagen BYT, CABA, CDAA, CCZA EA888 TSI 1.8 gen1 VVT in
I-4cyl 1.8L 16v DOHC (RPRH/RPRH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 270°	263°
duration @ 1.0mm	: 223°	215°
valve lift	: 11.75mm	11.00mm
cam lift	: 6.95mm	6.55mm
lobe angle	: 112°	112°
timing @ 1.0mm	: -1° / 44°	39° / -4°
valve lift @ TDC	: 0.95mm	0.70mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	99545/s	99545/s
lower retainer :	99546/O	99546/O
exterior spring :	PAC-E99865	PAC-E99865
interior spring :	PAC-I99865	PAC-I99865
fitted load / length :	34kg @ 30.0mm	39kg @ 28.5mm
max. load / lift :	79kg @ 12.5mm	79kg @ 11.0mm

REMARKS :

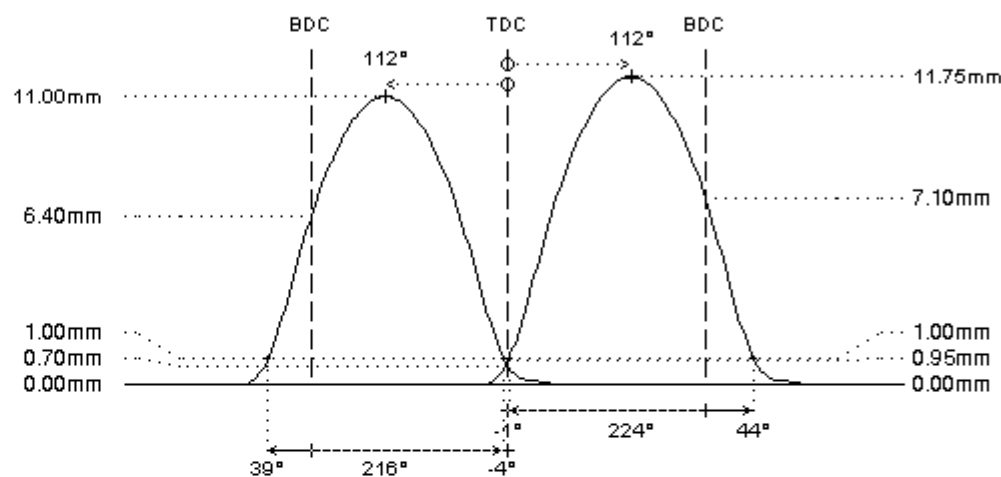

REMARKS :

- # VVT delete camshaft set includes adjustable sprockets on both intake and exhaust camshaft.
- # valve seals must be lowered. Distance between valve seal and retainer must be at least 0.6mm at full lift.
- # ECU reprogramming required