


7604701

hot street - dirt track

Volkswagen BYT, CABA, CDAA, CCZA EA888 TSI 1.8 gen1 VVT in
I-4cyl 1.8L 16v DOHC (RPRH/RPRH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 278°	262°
duration @ 1.0mm	: 236°	220°
valve lift	: 12.00mm	11.00mm
cam lift	: 7.16mm	6.65mm
lobe angle	: 122°	110°
timing @ 1.0mm	: -4° / 60°	40° / -0°
valve lift @ TDC	: 0.85mm	1.25mm
parts setup:		
cam wheels :	:	:
follower	: INFO	: INFO
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99545/s	: 99545/s
lower retainer	: 99548/O	: 99548/O
exterior spring	: PAC-E19865	: PAC-E19865
interior spring	: PAC-I19865	: PAC-I19865
fitted load / length	: 29kg @ 31.5mm	: 34kg @ 30.0mm
max. load / lift	: 79kg @ 14.0mm	: 79kg @ 12.5mm

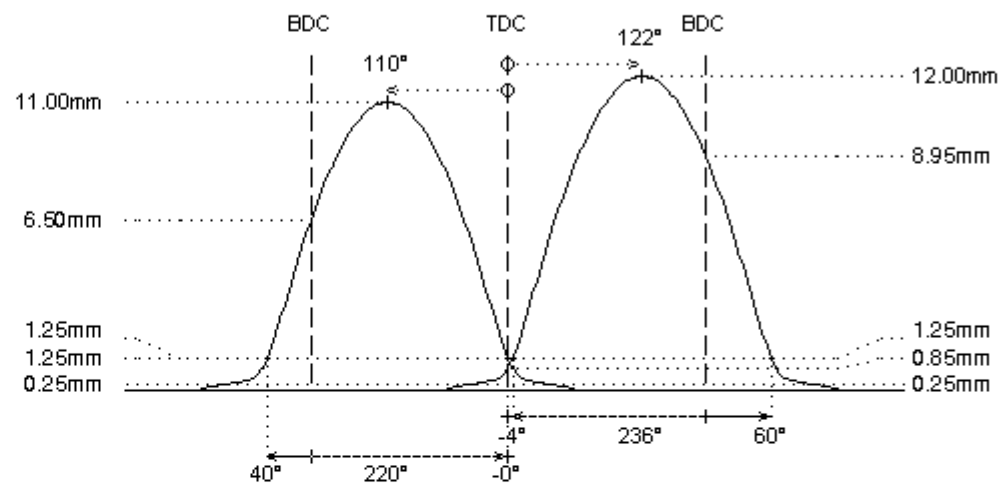

REMARKS :

REMARKS :

16x CAT017 rocker arm
16x CAT018 shaft for rocker arm
16x CAT019 support for rocker arm
Use flat shims to increase the valve spring tension to the suggested load.