

O.E.M.

Volkswagen 2G, AAV 55hp
I-4cyl 1.3L 8v SOHC (DTH/DTH)



intake exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 254°	254°
duration @ 1.0mm	: 204°	204°
valve lift	: 7.20mm	7.20mm
cam lift	:	
lobe angle	: 109°	109°
timing @ 1.0mm	: -7° / 31°	31° / -7°
valve lift @ TDC	: 0.50mm	0.55mm


parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	O.E.M.	O.E.M.

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

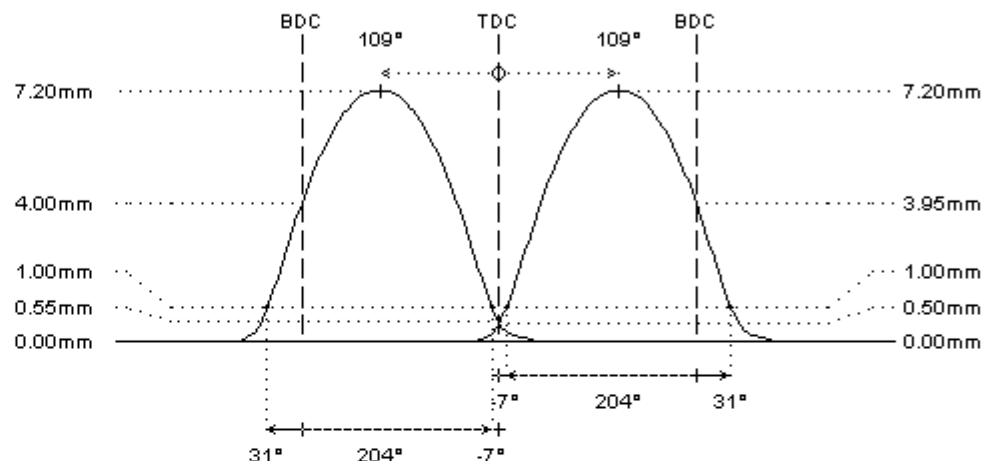

REMARKS :

- # Different OEM camshafts were used in this engine family. For ordering the correct sports camshaft, please check:
 - engine reference code
 - cam reference code
 - cam lift
 - keyway position: centered between 1st and 2nd cam lobe (54°)(76061xx) OR close to 1st cam lobe (22°)(76161xx)

Example: engine code "2G" has camshaft code "030 E", cam lift "7.2mm" and centered keyway.