

O.E.M.

Volkswagen PY 113hp (G40)

I-4cyl 1.3L 8v SOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 241°	283°
duration @ 1.0mm	: 199°	231°
valve lift	: 8.70mm	10.00mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -10° / 29°	46° / 5°
valve lift @ TDC	: 0.30mm	1.40mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

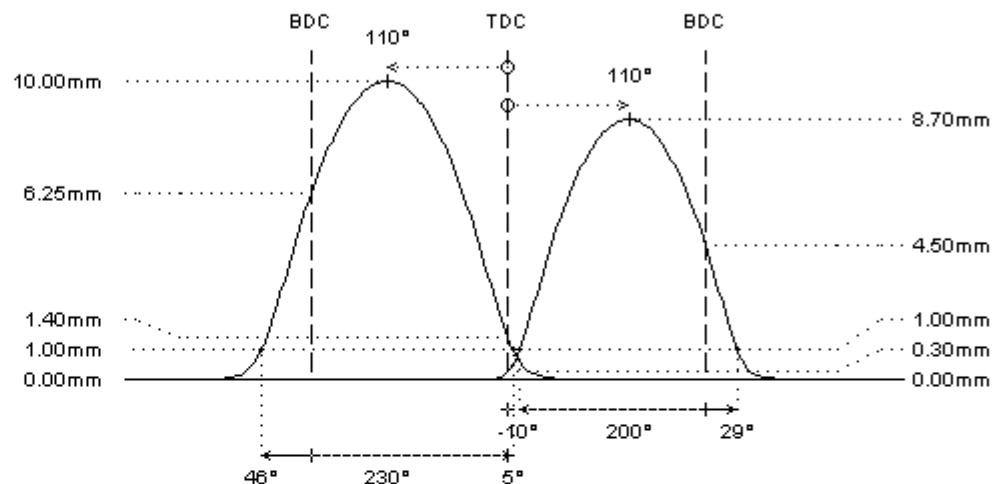

REMARKS :

- # Different OEM camshafts were used in this engine family. For ordering the correct sports camshaft, please check:
 - engine reference code
 - cam reference code
 - cam lift
 - keyway position: centered between 1st and 2nd cam lobe (54°)(76061xx) OR close to 1st cam lobe (22°)(76161xx)

Example: engine code "PY" has camshaft code "030 B", cam lift "8.7/10.0mm" and centered keyway.