

7606145

sport

Volkswagen 2G, AAV 55hp

I-4cyl 1.3L 8v SOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 259°	259°
duration @ 1.0mm	: 225°	225°
valve lift	: 8.70mm	8.70mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 4° / 41°	40° / 5°
valve lift @ TDC	: 1.50mm	1.50mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

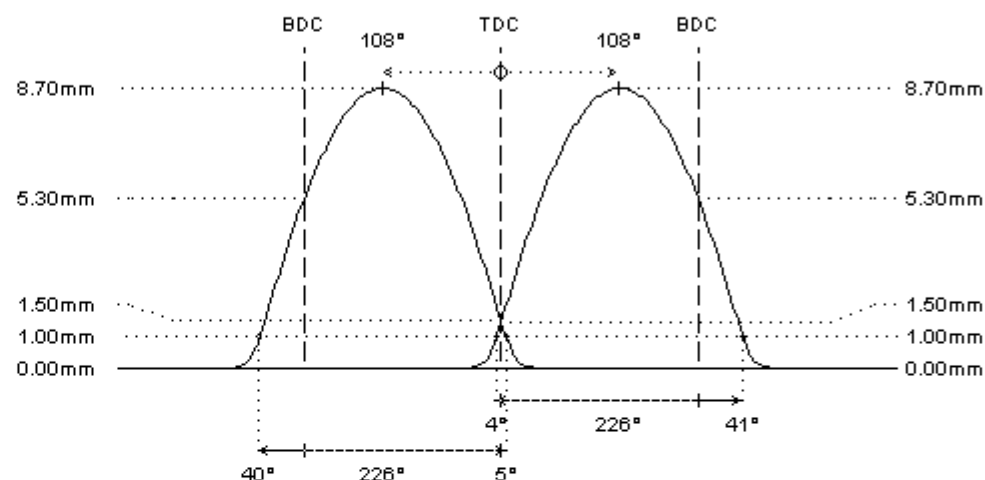

REMARKS :

- # Different OEM camshafts were used in this engine family. For ordering the correct sports camshaft, please check:
 - engine reference code
 - cam reference code
 - cam lift
 - keyway position: centered between 1st and 2nd cam lobe (54°)(76061xx) OR close to 1st cam lobe (22°)(76161xx)

Example: engine code "2G" has camshaft code "030 E", cam lift "7.2mm" and centered keyway.

- # adjusted carburettor settings required