


O.E.M.

Volkswagen AUA, APE, BBY, BKY 75hp (belt drive, no VVT)
I-4cyl 1.4L 16v DOHC (RPRH/RPRH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 225°	234°
duration @ 1.0mm	: 176°	185°
valve lift	: 8.45mm	8.70mm
cam lift	: 4.50mm	4.60mm
lobe angle	: 110°	104°
timing @ 1.0mm	: -22° / 18°	16° / -11°
valve lift @ TDC	: 0.05mm	0.40mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		
fitted load / length	: 23kg @ 34.0mm	: 23kg @ 34.0mm
max. load / lift	: 50kg @ 10.0mm	: 50kg @ 10.0mm

REMARKS :

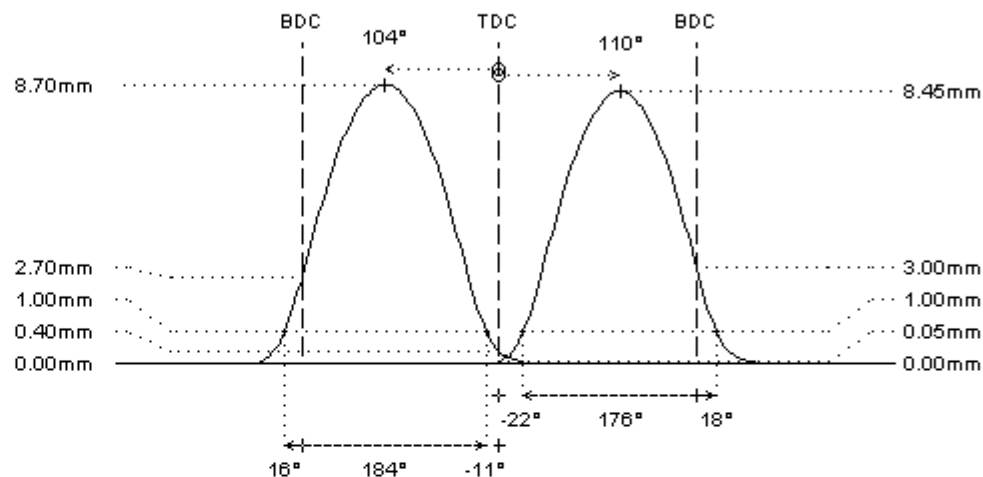

REMARKS :

- # These camshafts can only be used for engines without VVT system. They cannot be used in engines with VVT system, even when the VVT system is disabled