

7607313

tarmac rally - race

Volkswagen AAA


VR-6cyl 2.8L 12v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 305°	305°
duration @ 1.0mm	: 262°	262°
valve lift	: 13.00mm	13.00mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 25° / 57°	57° / 25°
valve lift @ TDC	: 4.40mm	4.40mm
parts setup:		
cam wheels :	: TVW034	: TVW034
follower	: CC005	: CC005
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99860	: PAC-E99860
interior spring	: PAC-I99860	: PAC-I99860
fitted load / length	: 31kg @ 33.0mm	: 31kg @ 33.0mm
max. load / lift	: 99kg @ 13.0mm	: 99kg @ 13.0mm

REMARKS :

check interference between valve seal and retainer over 10,5mm lift

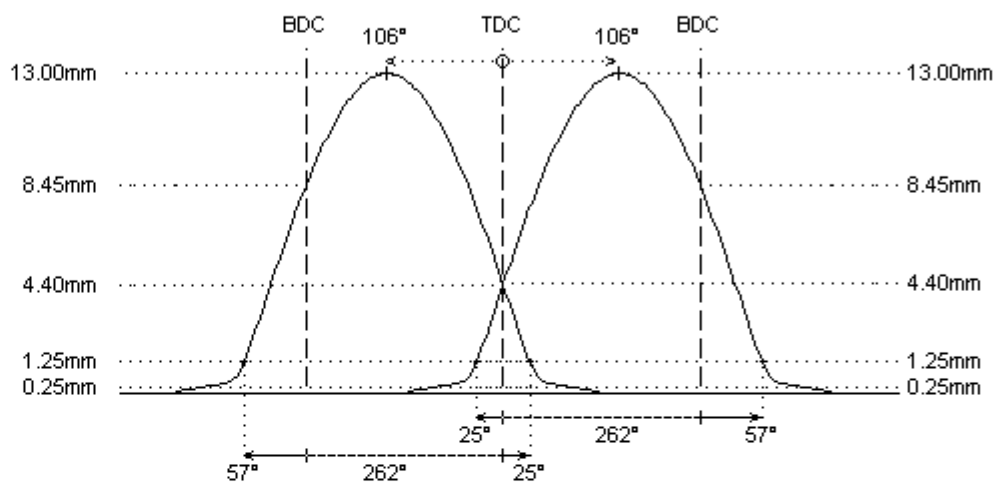

REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # - valve clearance is to be adjusted using mechanical lash caps
 - please make sure that the lash cap does not touch the valve locks !
- # stand alone ECU based on throttle position sensor required