

7640245


hot street - dirt track

Volkswagen hydraulic tappets, 8mm valves, MK-8H

I-4cyl 1.8L 8v SOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 294°	294°
duration @ 1.0mm	: 254°	254°
valve lift	: 11.65mm	11.65mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 19° / 55°	55° / 19°
valve lift @ TDC	: 3.60mm	3.65mm
parts setup:		
cam wheels :	CCR3232	CCR3232
follower :	CC005	CC005
valve lash :	TS103	TS103
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	99320	99320
lower retainer :	remove	remove
exterior spring :	PAC-E92009	PAC-E92009
interior spring :	PAC-I92009	PAC-I92009
fitted load / length	: 32kg @ 34.2mm	: 32kg @ 34.2mm
max. load / lift	: 101kg @ 14.0mm	: 101kg @ 14.0mm

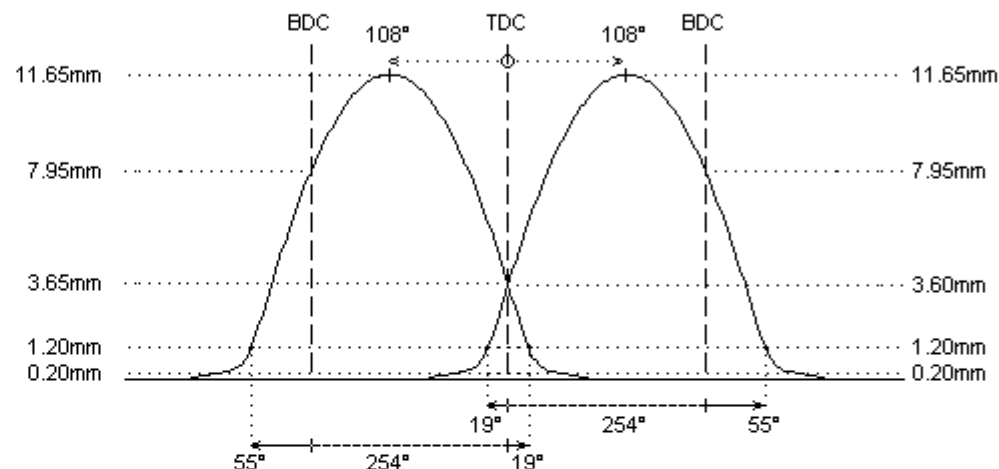

REMARKS :

- # to use these camshafts in cylinderheads with hydraulic followers in O.E.M. version:
 - change hydraulic followers for mechanical tappets (ref. CC005)
 - use cam base circle diameter of maximum 34mm (SPECIFY WHEN ORDERING)

REMARKS :

- # if required, use extra shims to increase spring load
- # use PAC-D12009 (GOLD quality) for applications over 12.5mm valve lift / 8500rpm