

7640247

tarmac rally - race


Volkswagen 2E(92-94), ADY (94-95), AGG (95-97) hydraulic tappets, 7mm valves, MK-7H
I-4cyl 2.0L 8v SOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 299°	299°
duration @ 1.0mm	: 269°	269°
valve lift	: 14.45mm	14.45mm
cam lift	:	
lobe angle	: 104°	104°
timing @ 1.0mm	: 31° / 58°	59° / 30°
valve lift @ TDC	: 5.60mm	5.50mm
parts setup:		
cam wheels :	: CCR3232	: CCR3232
follower	: CC005	: CC005
valve lash	: TS103	: TS103
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99371	: 99371
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009
fitted load / length	: 34kg @ 34.0mm	: 35kg @ 33.7mm
max. load / lift	: 109kg @ 15.0mm	: 110kg @ 15.0mm

REMARKS :

- # use PAC-D12009 (GOLD quality) for applications over 12.5mm valve lift / 8500rpm
- # if required, use extra shims to increase spring load

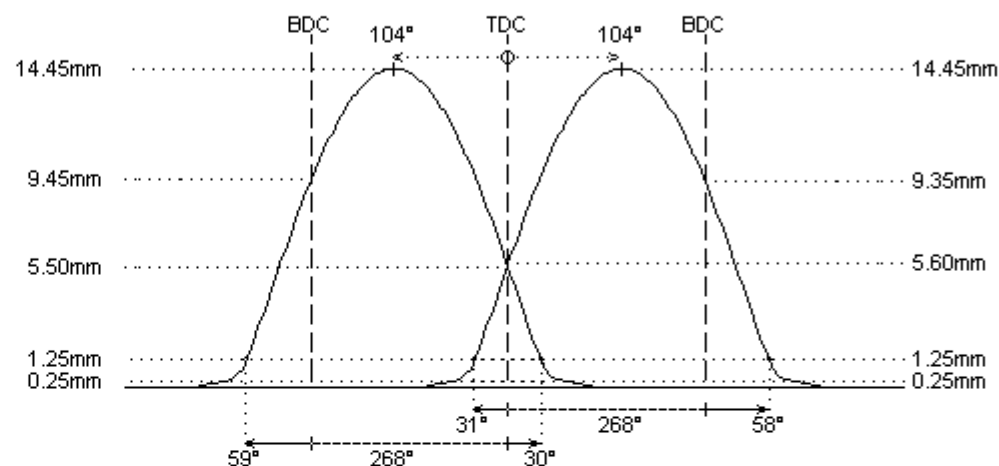

REMARKS :

- # to use these camshafts in cylinderheads with hydraulic followers in O.E.M. version:
 - change hydraulic followers for mechanical tappets (ref. CC005)
 - use cam base circle diameter of maximum 34mm (SPECIFY WHEN ORDERING)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors