

O.E.M.

Audi AJG 163hp

V-6cyl 2.4L 30v DOHC (DTH/DTH)




	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 245°	253°
duration @ 1.0mm	: 204°	210°
valve lift	: 8.40mm	10.40mm
cam lift	:	
lobe angle	: 112°	112°
timing @ 1.0mm	: -12° / 36°	38° / -8°
valve lift @ TDC	: 0.25mm	0.45mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 19kg @ 34.6mm	: 29kg @ 33.1mm
max. load / lift	: 53kg @ 10.0mm	: 63kg @ 11.0mm

REMARKS :

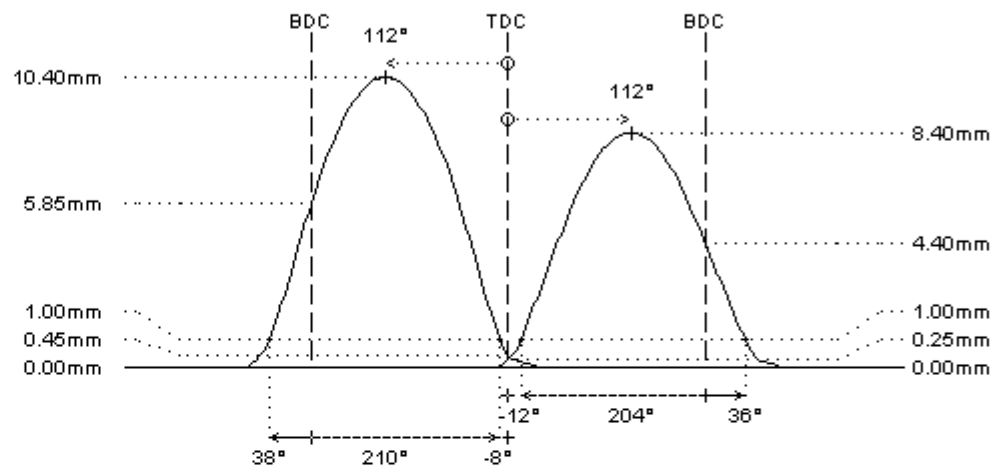

REMARKS :

- # - steel billet camshafts
- supplied with **adjustable chain sprockets** to optimize intake cam timing