

3701204

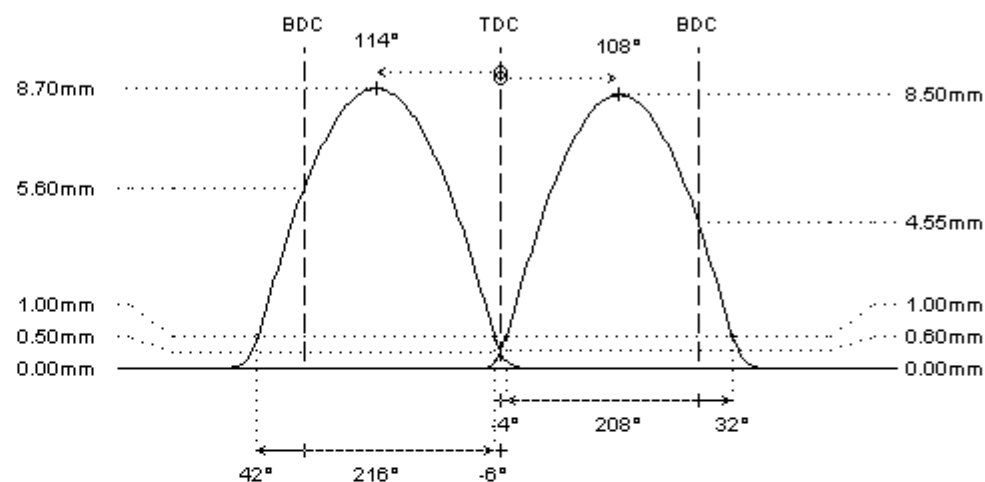
sport

Mazda B6 /turbo hydraulic cam followers

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 239°	252°
duration @ 1.0mm	: 208°	216°
valve lift	: 8.50mm	8.70mm
cam lift	:	
lobe angle	: 108°	114°
timing @ 1.0mm	: -4° / 32°	42° / -6°
valve lift @ TDC	: 0.60mm	0.50mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 20kg @ 39.5mm	: 20kg @ 39.5mm
max. load / lift	: 59kg @ 10.0mm	: 59kg @ 10.0mm

REMARKS :**REMARKS :**

- # camshafts for use in 1598cc B6 engines:
- long intake camshaft with sleeve for distributor drive
- short exhaust camshaft