

7300423

hot street - dirt track

Triumph TR6PI TR6

I-6cyl 2.0L 12v SOHC (FT/FT)



intake exhaust

camshaft data:

lash ramp	: 0.45mm	0.45mm
duration @ 0.1mm	: 268°	268°
duration @ 1.0mm	: 230°	230°
valve lift	: 10.50mm	10.50mm
cam lift	: 10.50mm	10.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 5° / 45°	45° / 5°
valve lift @ TDC	: 2.00mm	2.00mm


parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	✗ not available	✗ not available
interior spring :		

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

- # original valve spring info is not available
- # valve spring kit can be developed on request
- # check std valve spring setup for coil bind length and use valve spring kit if required

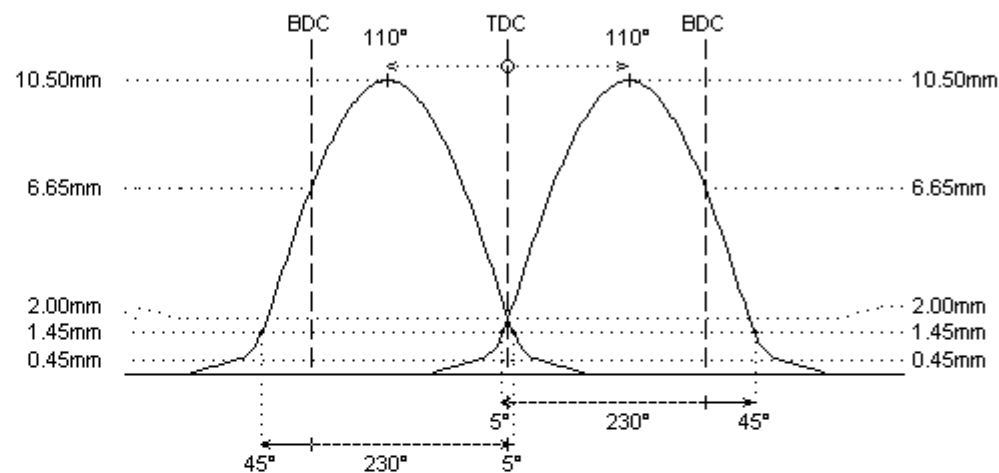

REMARKS :

- # camshafts are ground on new blanks