

1300687

sport

Bmw S14 (23 4 EA) 195hp

I-4cyl 2.3L 16v DOHC (DTs/DTs)

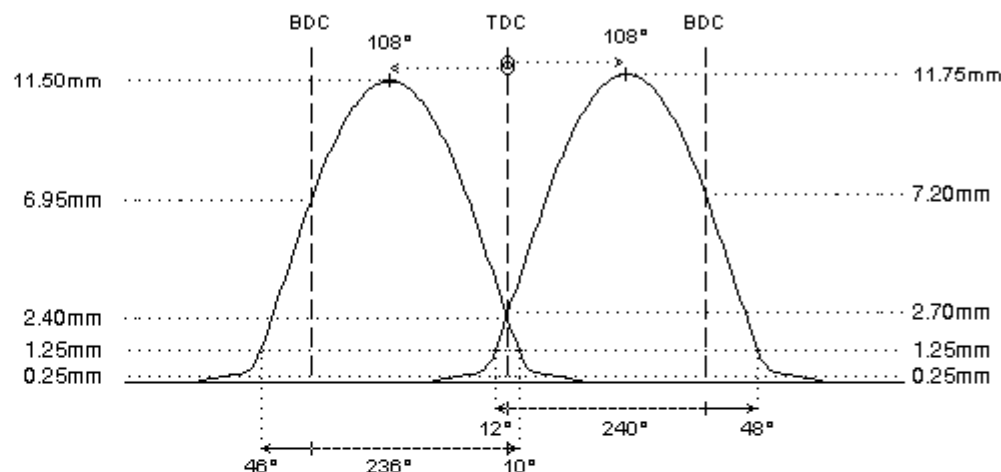


	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 274°	269°
duration @ 1.0mm	: 240°	236°
valve lift	: 11.75mm	11.50mm
cam lift	: 11.75mm	11.50mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 12° / 48°	46° / 10°
valve lift @ TDC	: 2.70mm	2.40mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :**REMARKS :**

These camshafts can be used in following engines (different valves are used, please contact Cat Cams in case of doubt):

- S14 (23 4 EA), 2302cc, 195hp
- S14 (23 4 S2), 2302cc, 215hp
- S14 (25 4 S1), 2467cc, 238hp

evolution of 1300657