

1300724

sport

Bmw M30 150hp

I-6cyl 2.5L 12v SOHC (RP/RP)



	intake	exhaust
camshaft data:		
lash ramp	: 0.15mm	0.15mm
duration @ 0.1mm	: 294°	294°
duration @ 1.0mm	: 243°	243°
valve lift	: 9.45mm	9.45mm
cam lift	: 7.50mm	7.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 10° / 53°	53° / 10°
valve lift @ TDC	: 2.00mm	2.00mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 31kg @ 37.0mm	: 31kg @ 37.0mm
max. load / lift	: 86kg @ 11.5mm	: 86kg @ 11.5mm

REMARKS :

- # original valve spring info is not available
- # larger excenter discs (part number "99019" - D18mm) available to adjust valve clearance for camshafts with reduced cam base diameter
- # Cat Cams steel billet rocker arms (part number "CAT021") are strongly advised for use over 7000rpm

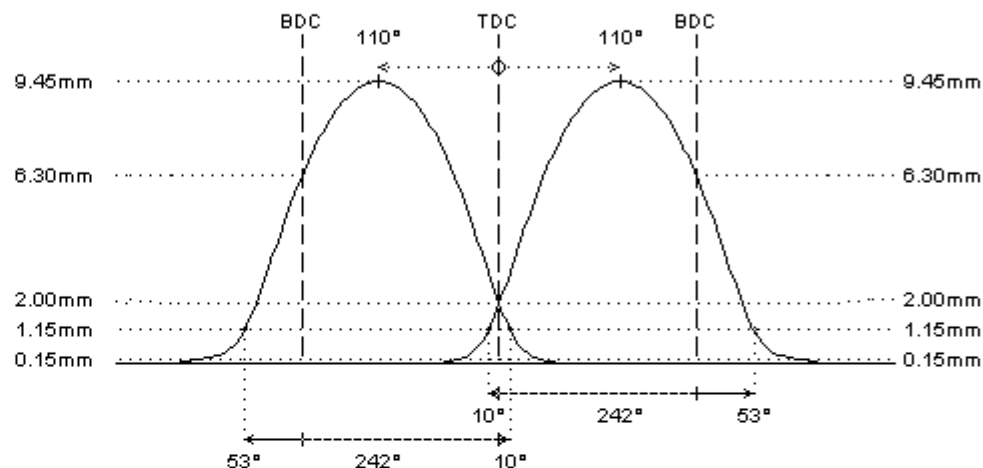

REMARKS :

- # 13007xx: pre motronic
- # 13008xx: motronic 1
- # 13009xx: motronic 2



NOW AVAILABLE: CATCAMS steel billet rocker arms (coated) with original Mahle valve adjustment screws !!!